

LOCTITE®

maintenance solutions



www.loctite.com



Henkel Technologies

Making the Right Choice

With this comprehensive guide for maintenance engineers in all industries, you can easily select the correct Loctite® product needed to overcome your immediate problems and to prevent future breakdowns and failures. Some of the most common maintenance problems and Loctite solutions can be found in the Table of Contents on page 3.

This guide has been developed to make your product selection quicker, easier, and right the first time. We have even included a "Need It Now" order form so you can quickly select the products you need. However, if more information is needed, all you have to do is visit the Loctite website at www.loctite.com, or call 1.800.LOCTITE (562.8483) for a copy of the latest version of *The Adhesive Sourcebook*, our full line catalog.



For additional information
visit our web site at:

www.loctite.com



Table of Contents



- | | | | | | |
|----|---|--|----|---|--|
| 4 |  | Threadlocking
Prevent fastener loosening | 24 |  | Lubricants
Prevent friction, heat, or wear between metal surfaces |
| 6 |  | Thread Sealing
Prevent leaks - air, hydraulic | 26 |  | Lubrication - Anti-Seize
Prevent rust, corrosion, galling, or seizing on metal parts in extreme environments |
| 8 |  | Gasketing
Prevent leaks - gasket, oil, transmission, coolant | 28 |  | Surface Protection and Rust Prevention
Stabilize existing rust, guard against corrosion |
| 10 |  | Retaining
Prevent backlash - key wallow, spun bearings, shaft alignment, wear | 30 |  | Parts and Surface Cleaning
Clean and degrease parts and work surfaces |
| 12 |  | Metal Rebuilding and Shaft Repair
Repair worn surfaces and damaged parts | 32 |  | Hand Cleaners |
| 14 |  | Wear Prevention and Rebuilding
Rebuild worn or corroded surfaces - material handling equipment | 34 |  | Bonding
Fastening and joining |
| 16 |  | Floor and Concrete Repair
Restore old concrete or cracked floors | 36 |  | Kits, Specialty, and Emergency Repair Products |
| 18 |  | Anti-Slip Flooring
Guard against slippery pedestrian or vehicular areas | 38 |  | Accessories |
| 20 |  | Grouting
Mount heavy equipment or set anchor bolts | 39 |  | Need It Now! Form |
| 22 |  | Belt Repair
Repair damaged conveyor belts | 41 |  | Product Ordering Information |




Threadlocking

Locking of Threaded Fasteners

- Prevents loosening from shock and vibration
- Single part – clean and easy to apply
- Can be used on various sizes of fasteners – reduces inventory costs
- Seals threads
- Stops rust and corrosion

THREADLOCKING

Are the parts already assembled?

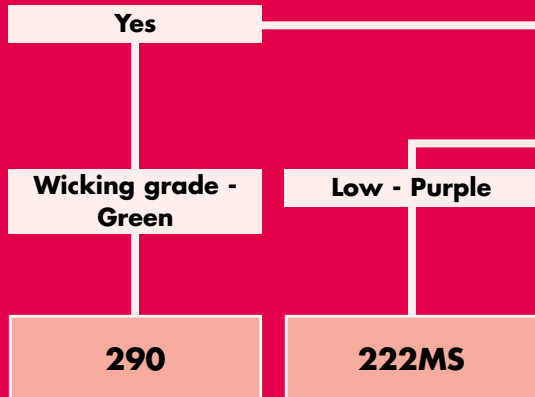

Helpful Hints:

- Clean parts with Loctite® ODC-Free Cleaner and Degreaser before applying the adhesive
- If the threadlocker will be applied below 40°F, pre-treat with Loctite® 7649 (Primer N)
- If the parts were in contact with aqueous washing solutions or cutting fluids which leave a protective layer on the surface, wash with hot water before use

Solution

Fastener Size	#2 to 1/2"	Up to 1/4"
Strength	Medium/High	Low
Cure Time (Fixture/Full Strength)*	20 min./24 hr.	20 min./24 hr.
Breakaway/Prevail Torque (lb. in.)	85/250	53/30
Temperature Resistance for Continuous Service	300°F (150°C)	300°F (150°C)
Available Sizes	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml

* Typical value @ 70°F (22°C)

Additional Products

Name	Strength	Breakaway/Prevail Torque (lb./in.)	Features
220	Low	85/170	Wicking
272	High	200/220	High Temp up to 1 1/2"
277	High	275/275	Fasteners up to 1 1/2"
2440	Medium	215/53	Primerless
2760	High	325/320	Primerless



Loctite® 290 Wicking Threadlocker

Recommended for locking pre-assembled fasteners, i.e. instrumentation screws, electrical connectors, and set screws. Also seals porosities in welds and metal parts. Mil Spec (S-46163A) Type III, Grade R. NSF®/ANSI 61.



Loctite® 222MS Low Strength Threadlocker

Recommended for low-strength threadlocking of adjusting screws, countersunk head screws, and set screws; on collars, pulleys, tool holders, and controllers. Also for low strength metals such as aluminum or brass. Mil-Spec (S-46163A) Type II, Grade M.

Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.


Primer is optional with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is required with:

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.



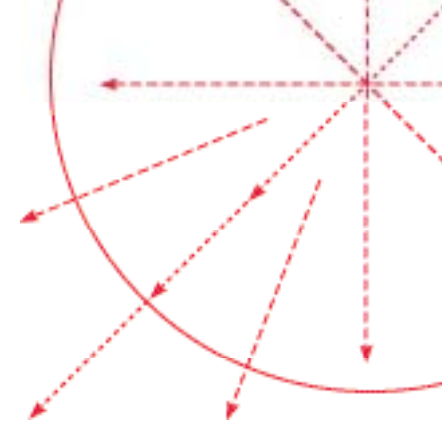

No

What strength do you require?

Medium - Blue

High - Red

Liquid Product

Semi-Solid Product

Liquid Product

Semi-Solid Product

242®

243
(Improved Oil Tolerance)

248 Stick

262

268 Stick

1/4" to 3/4"

1/4" to 3/4"

1/4" to 3/4"

Up to 3/4"

Up to 3/4"

Medium

Medium

Medium

High

High

10 min./24 hr.

10 min./24 hr.

10 min./24 hr.

20 min./24 hr.

20 min./24 hr.

110/43

180/62

110/43

189/275

189/275

300°F (150°C)

300°F (150°C)

300°F (150°C)

300°F (150°C)

300°F (150°C)

10 ml, 50 ml, 250 ml

10 ml, 50 ml, 250 ml

9 g, 19 g

10 ml, 50 ml, 250 ml

9 g, 19 g



**Loctite® 242®
Removable
Threadlocker**

Effective on all types of metal threaded fasteners. Prevents loosening on vibrating parts such as pumps, motor mounting bolts, gear boxes, or presses. Removable with hand tools. NSF®/ANSI 61. ABS Approved.



**Loctite® 243
Threadlocker**

With improved oil tolerance, 243 is effective on all types of metal threaded fasteners. Prevents loosening on vibrating parts such as pumps, motor mounting bolts, gear boxes, or presses. Removable with hand tools. NSF®/ANSI 61. Agriculture Canada Approved.



**Loctite® 248
Medium Strength
Threadlocker Stick**

Semi-solid stick form is convenient, portable, and great for hard to reach applications. Blue, medium strength, general-purpose threadlocker ideal for all nut and bolt applications, especially fasteners between 1/4" and 3/4". Removable with hand tools.



**Loctite® 262
High Strength
Threadlocker**

Red 262 is a high strength product for fasteners up to 3/4" (20mm). Localized heat and hand tools are required to separate parts. Solvent resistant. Mil-Specs (S-46163A) Type II, Grade O. ABS Approved. Agriculture Canada Approved.



**Loctite® 268
High Strength
Threadlocker Stick**

Convenient semi-solid stick form is portable and less messy. Red, high strength threadlocking adhesive that prevents loosening of threaded fasteners. 268 is particularly well suited for heavy-duty applications.




Thread Sealing

- Replaces tapes and pastes
- Liquids ensure complete contact between threads for a 100% seal
- Liquids will not creep, shrink, shred, or block systems (including filters)
- Disassembly can be achieved easily with basic hand tools

THREAD SEALING

Are the parts metal or plastic?

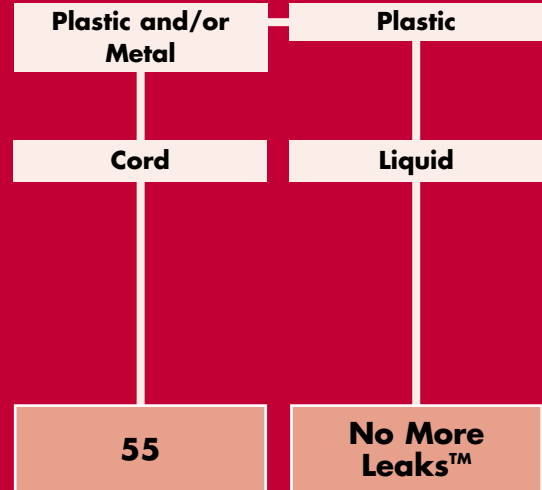

Helpful Hints:

- If the sealant (545, 565 or 567) will be applied below 40°F, pre-treat with Loctite® 7649 Primer N
- All parts must be clean and dry before sealing - use Loctite® ODC-Free Cleaner and Degreaser

Solution

Description	Cord	White Paste
Maximum Thread Size	4"	3"
Temperature Resistance	300°F (150°C)	300°F (150°C)
Maximum Pressure Resistance (psi) /Cure Time	10,000 psi /instant	10,000 psi /N.A.
Substrate to be Sealed	Metal, plastic or both	Plastic
Instant Low Pressure Seal	Yes	Yes
Available Sizes	5,700 inches	2 oz, 7 oz, 1 pint

Additional Products

Name	Type
Thread Sealant 564	Instant Seal
H.V.A.C. Pipe Joint Compound	Seals oil, refrigerants, butane, propane, and more
Pipe Joint Compound	High Temp, Non-hardening
Thread Sealant with PTFE	Non-hardening



Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

Primer is *optional* with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is *required* with:

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.




Loctite® 55 Pipe Sealing Cord

Can be safely applied on metal and plastic threaded fittings. Potable water: ANSI/NSF® Standard 61. UL Listed and Certified to CSA® International.

Loctite® No More Leaks™

Recommended for use on threaded plastic fittings carrying hot or cold water, i.e. industrial and agricultural plastic water pipe systems, or drainage systems.

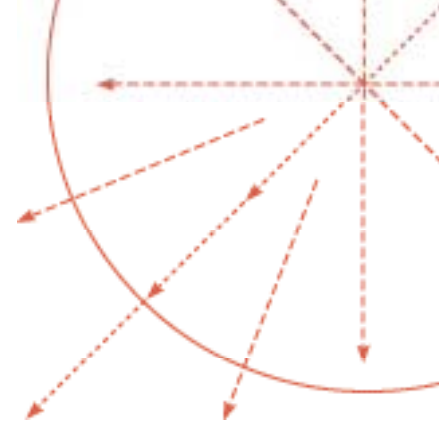

Metal parts			
Are the threads fine or coarse?			
Fine	Coarse		
Do you prefer a solid or a liquid? (Solid is ideal for overhead or hard to reach applications)			
Liquid		Semi-Solid	
545 (Hydraulic and pneumatic)	565 PST®	567 PST®	561 PST® Stick
Purple Liquid	White Paste	White Paste	White Stick
Up to 2"	Up to 2"	3"	3"
300°F (150°C)	300°F (150°C)	400°F (204°C)	400°F (204°C)
10,000 psi /24 hrs	10,000 psi /72 hrs	10,000 psi /72 hrs	10,000 psi /72 hrs
Metal	Metal	Stainless Steel, Aluminum	Stainless Steel, Aluminum
No	Yes	No	Yes
10 ml, 50 ml, 250 ml	6 ml, 50 ml, 250 ml, 300 ml	6 ml, 50 ml, 250 ml, 16 oz can	19 gram



Loctite® 545 Thread Sealant

Recommended for fine threaded fittings as used in hydraulic and pneumatic installations and small fittings in general. ABS Approved. Agriculture Canada Approved.



Loctite® 565 PST® Thread Sealant

A general-purpose instant sealer for tapered and straight/tapered fittings. Controlled strength for ease of disassembly. CSA® 3319-81 and 3319-01. UL® MH007(N). NSF®/ANSI 61. ULC-Canada Approved. Agriculture Canada Approved.



Loctite® 567 PST® Thread Sealant

Withstands temperatures to 400°F with excellent solvent resistance. Locks and seals tapered pipe threads and fittings, including high pressure applications. Disassembles with hand tools. ABS Approved.



Loctite® 561 PST® Thread Sealant Stick with PTFE

Semi-solid stick form is convenient, portable, and less messy. Formulated for fast, reliable curing on metal, tapered pipe threads and fittings. 561 provides high pressure sealing and withstands continuous operating temperatures of -65°F to 300°F (-54°C to 150°C).



Gasketing

Sealing of Flanges

- No shimming effect – controlled tolerances, no need for re-torquing
- Fill all voids – reduce the need for a fine surface finish of flanges
- Parts can be disassembled easily even after extended service
- Resists high pressure when fully cured


GASKETING

Does the existing gasket need to be used as a shim?

Helpful Hints:

- If there are traces of old gasket left on the parts to be sealed, clean with Loctite® Chisel® Gasket Remover
- All parts must be clean & dry before sealing – use Loctite® ODC-Free Cleaner and Degreaser
- Anaerobic products cure between metal surfaces with the absence of air

Solution

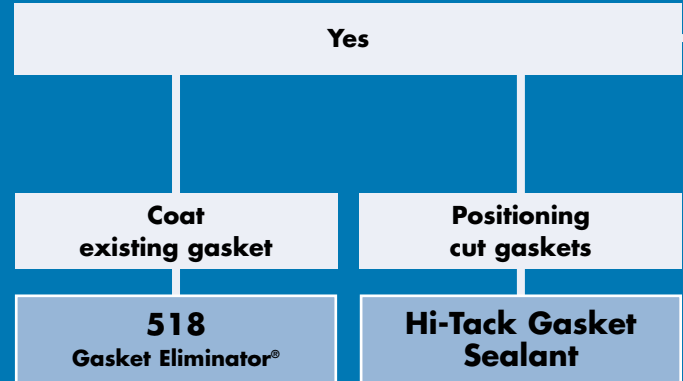

Gasket Type	Formed-in-place	Use with cut gasket
Gap Fill	N.A.	N.A.
Cure Method	Anaerobic	Solvent evaporation
Tack-Free Time	N.A.	N.A.
Temperature Resistance (Continuous/Intermittent)	300°F (150°C)/N.A.	500°F (260°C)/N.A.
Instant Seal	Excellent	Excellent
Oil Resistance	Excellent	Good
Water/Glycol Resistance	Moderate	N.A.
Available Sizes	6 ml, 50 ml tube	0.25 pt, 1 pt, 9 oz. aerosol

Additional Products

Name

- Gasket Sealant #1
- Gasket Sealant #2
- Aviation Gasket Sealant
- High Performance Silicones
(598 Black, 5920 Copper, 5699 Grey)
- Superflex® RTV Silicones
(Black, Clear, White, Blue)





Loctite® 518 Gasket Eliminator® Flange Sealant

Recommended for coating and re-using gaskets to improve sealing. Low strength for easy disassembly. Spray Loctite® Primer N on both flange surfaces and both sides of the gasket. NSF®/ANSI 61 Certified. Agriculture Canada Approved.



Loctite® Hi-Tack Gasket Sealant

Adhesive/sealant for holding pre-cut gaskets in place during assembly. Can be applied to all rubber, cork, paper and metal gaskets.

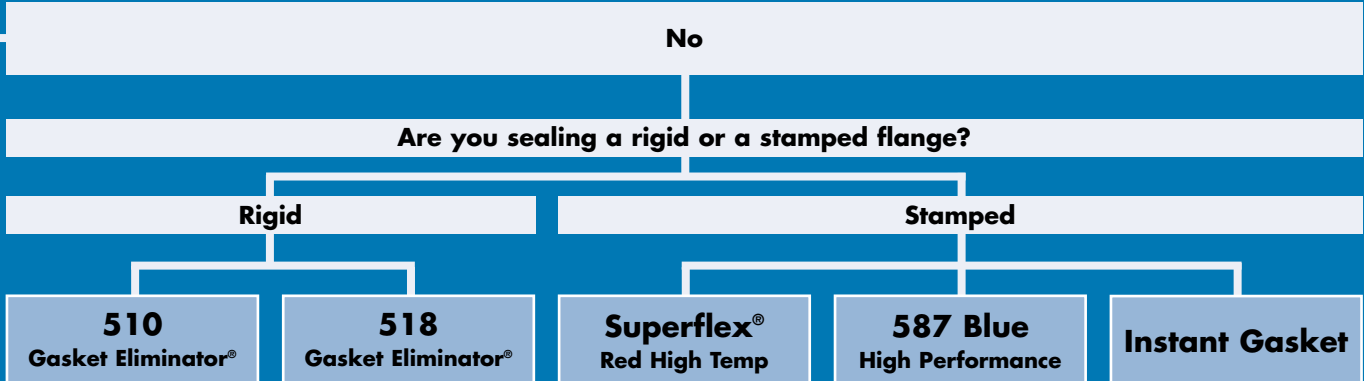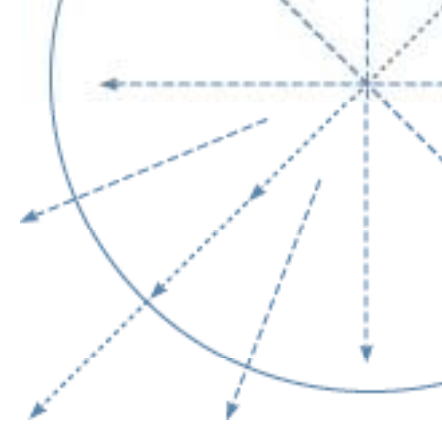

510 Gasket Eliminator®	518 Gasket Eliminator®	Superflex® Red High Temp	587 Blue High Performance	Instant Gasket
Formed-in-place	Formed-in-place	Formed-in-place	Formed-in-place	Formed-in-place
0.010" (0.25mm)	0.010" (0.25mm)	0.250" (6.35mm)	0.250" (6.35mm)	0.250" (6.35mm)
Anaerobic	Anaerobic	Moisture (RTV)	Moisture (RTV)	Moisture (RTV)
N.A.	N.A.	< 60 min.	50 min.	5 min.
400°F (204°C)/N.A.	300°F (150°C)/N.A.	500°F (260°C)/600°F (316°C)	400°F (204°C)/500°F (260°C)	450°F (232°C)/550°F (288°C)
Excellent	Excellent	Excellent	Excellent	Excellent
Excellent	Excellent	Excellent	Excellent	Excellent
Excellent	Excellent	Moderate	Excellent	Excellent
50 ml tube	6 ml, 50 ml tube	80 ml, 300 ml, 7.25 oz. can, 12 oz. tube	70 ml, 300 ml cart., 8.75 oz. can	4 oz. can, 5 oz. cart., 7 oz. can



Loctite® 510 Gasket Eliminator® Flange Sealant
Recommended for use on rigid iron and steel flanges. Spray Loctite® Primer N on only one surface. UL® Listed.



Loctite® 518 Gasket Eliminator® Flange Sealant
Recommended for use on rigid iron, steel, and aluminum flanges. Spray Loctite® Primer N on only one surface. NSF®/ANSI 61 Certified. Agriculture Canada Approved.



Loctite® Superflex® Red High Temp Silicone Sealant
Recommended for sealing all types of flanges including stamped sheet metal where high temperature resistance is needed.



Loctite® 587 Blue High Performance Silicone Gasket Maker
Recommended for sealing all types of flanges including stamped sheet metal. Designed for superior bonding properties to oil contaminated metals. ABS Approved.



Loctite® Instant Gasket
Makes high-performance, leakproof gaskets in one minute. Equipment can be returned to service immediately. Blowout resistant. Outperforms precut gaskets.



Retaining

Securing Cylindrical Assemblies

- Bond non-threaded cylindrical metal assemblies
- High and moderate strength products – can carry high loads and eliminate fretting
- Fill all voids – prevent corrosion
- Reduce the need for close tolerances
- 100 % contact – load and stress is distributed evenly over the joint

RETAINING

Is the assembly badly worn?

Helpful Hints:

- If the retainer will be applied below 40°F (5°C), pre-treat with Loctite® 7649 Primer N
- All parts must be clean & dry before sealing – use Loctite® ODC-Free Cleaner and Degreaser
- If the parts have been in contact with washing or cutting fluids containing nitrites, wash with hot water

Yes - Gaps up to
0.020" (0.5mm)

Solution

660
Quick Metal®

Strength Required	High
Shear Strength	3,300 psi
Diametrical Clearance	Up to .020" (0.5 mm)
Temperature Resistance	300 °F (150°C)
Available Sizes	6ml, 50 ml

* Requires heat cure to achieve temperature resistance

Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

Primer is optional with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is required with:

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.



Loctite® 660 Quick Metal® Retaining Compound

Used for repairing worn coaxial parts without remachining; enables re-use of worn bearing seats, keys, splines, tapers, or for retaining shims. Agriculture Canada Approved.




Metal Rebuilding and Shaft Repair

- High compressive strength
- Choice of mild steel aluminum or non-metallic fillers
- Can be machined, drilled, or tapped after cure
- Excellent resistance to aggressive chemicals

METAL REBUILDING AND SHAFT REPAIR

Repair or rebuild damaged parts

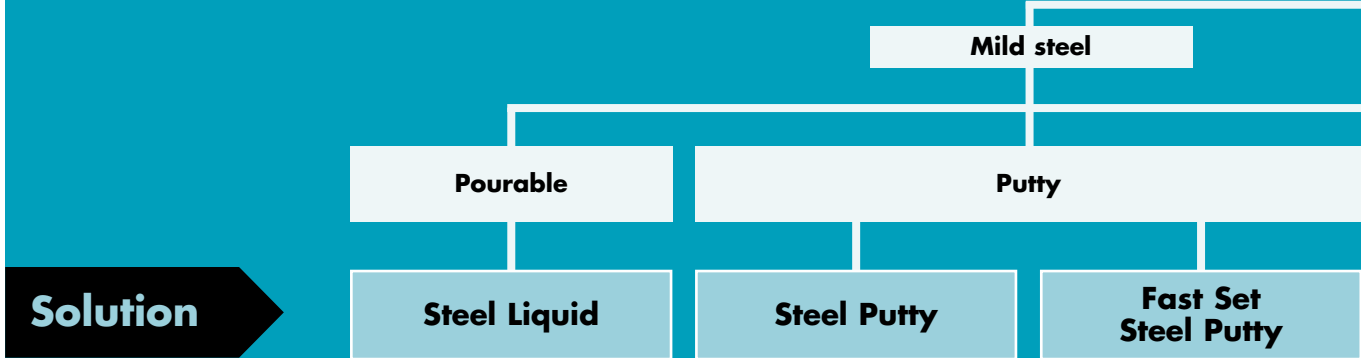

Solution	Steel Liquid	Steel Putty	Fast Set Steel Putty
Color	Grey	Grey	Grey
Maximum Temperature	225°F (107°C)	225°F (107°C)	200°F (93°C)
Working Time*	25 min.	30 min.	3 min.
Cure Time*	6 hrs.	6 hrs.	10 min.
Compressive Strength	13,500 psi	11,100 psi	10,800 psi
Available Sizes	1 lb., 4 lb., 16 lb.	1 lb., 4 lb., 25 lb.	1 lb. kit

* at 77°F (25°C)

Additional Products

Name
Fixmaster® Stainless Steel Putty
Fixmaster® Fast Set Steel Epoxy
Fixmaster® Wet Surface Repair Putty
Fixmaster® Underwater Repair Epoxy



Loctite® Fixmaster® Steel Liquid

High steel content. Pourable liquid filler used for making fixtures and molding. ABS Approved.




Loctite® Fixmaster® Steel Putty

High steel content putty. Recommended for repairing and rebuilding worn steel components, such as bearing and fan housings. ABS Approved.



Loctite® Fixmaster® Fast Set Steel Putty

A fast curing version of steel putty. Recommended for repairing pipes and other emergency repairs. ABS Approved.

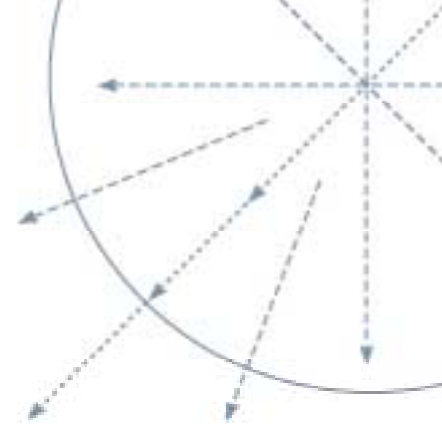

What material are you filling?

Aluminum

Kneadable stick

Pourable

Putty

High performance
chemical resistance

**Metal Magic
Steel™**

**Aluminum
Liquid**

**Aluminum
Putty**

**Superior
Metal**

Dark grey

250°F (121°C)

3 min.

10 min.

12,000 psi

4 oz. stick

Light grey

200°F (93°C)

20 min.

6 hrs.

17,000 psi

1 lb. kit

Light grey

200°F (93°C)

20 min.

6 hrs.

11,300 psi

1 lb. kit

Grey

250°F (121°C)

20 min.

6 hrs.

18,000 psi

1 lb. kit



Loctite® Fixmaster® Metal Magic Steel™

Kneadable two-part paste. Working time is 3 minutes - sets in 10 minutes. Adheres to damp surfaces. Can be drilled, filed, and painted. Ideal for emergency sealing of leaking tanks and pipes. Smooths welds, repairs small cracks in castings, and fills oversized bolt holes.



Loctite® Fixmaster® Aluminum Liquid

Fluid, self-leveling aluminum liquid. Can be poured into molds and cavities. Recommended for casting aluminum replacement parts and for making molds. ABS Approved.



Loctite® Fixmaster® Aluminum Putty

General purpose, aluminum putty for repair of all aluminum alloy components. ABS Approved.



Loctite® Fixmaster® Superior Metal Putty

Formulated with fine alloy particles with high compressive strength and chemical resistance. Recommended for use on all metals. Outstanding compressive strength, chemical resistance, non-rusting.



Wear Prevention and Rebuilding

- Restores worn surfaces
- Provides wear and impact resistant coatings
- Use on new parts to extend life
- Available in both trowelable and brushable forms


WEAR PREVENTION AND REBUILDING

Repair, rebuild, or protect wearing surfaces

Helpful Hints:

- Clean Surfaces with Loctite® ODC-Free Cleaner and Degreaser
- Use expanded metal to fill large voids
- Roughen surfaces to ensure adhesion

Solution

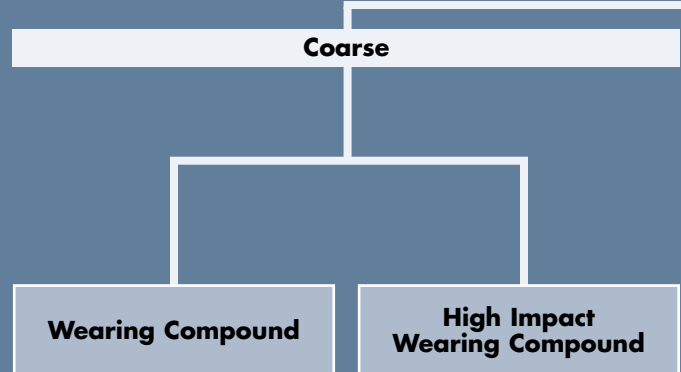

Color	Grey	Grey
Maximum Temperature	250°F (121°C)	250°F (121°C)
Working Time*	30 min.	30 min.
Cure Time*	7 hrs.	6 hrs.
Available Sizes	5 lb., 25 lb. kits	25 lb. kit

* At 77°F (25°C)

Additional Products

Name	Type
Nordbak® High Temp Wearing Compound	450°F (232°C)
Nordbak® High Temp Pneu Wear	450°F (232°C)
Nordbak® Ultra High Temp Wearing Compound	550°F (288°C)
Nordbak® Ultra High Temp Pneu Wear	550°F (288°C)
Nordbak® Fast Cure Wearing Compound	3 hr. cure
Nordbak® Fast Cure Pneu Wear	3 hr. cure
Nordbak® High Temp Brushable Ceramic	550°F (288°C)
Nordbak® Chemical Resistant Coating	150°F (66°C)
Nordbak® Castable Wearing Compound	Mold wear resistant parts
Nordbak® Ceramic Tile Adhesive	200°F (93°C)
Fixmaster® Flex Metal Primer	Promotes the adhesion of Loctite® Flex Urethanes to metal





Loctite® Nordbak® Wearing Compound

Trowelable compound that protects against sliding abrasion. Use to rebuild and protect chutes, pump housings, elbows, cyclones, and material handling equipment.



Loctite® Nordbak® High Impact Wearing Compound

Rubber modified compound absorbs impacts. Recommended where both sliding abrasion and impacts are present.

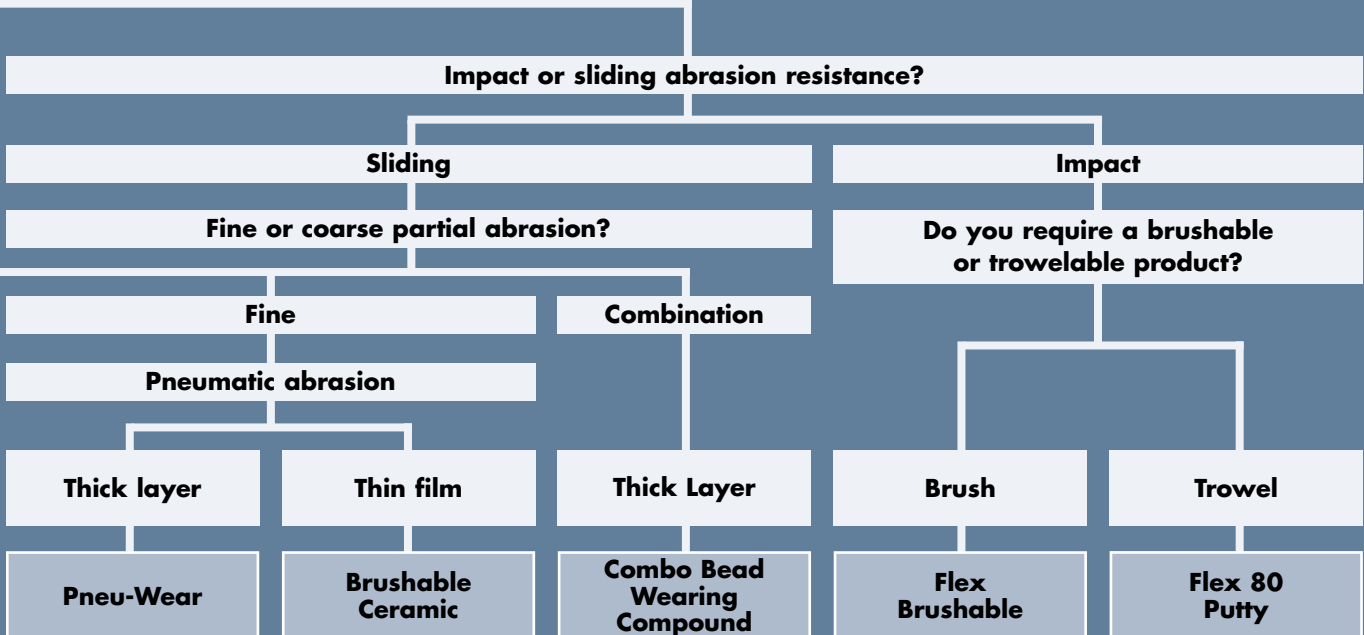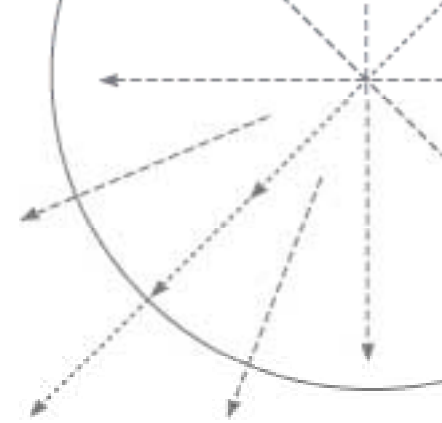

Grey	Grey or White	Grey	Black	Black
250°F (121°C)	200°F (93°C)	250°F (121°C)	180°F (82°C)	180°F (82°C)
30 min.	Grey 30 min., White 15 min.	25 min.	10 min.	10 min.
6 hrs.	Grey 6 hrs., White 5 hrs.	8 hrs.	6 hrs.	8 hrs.
3 lb., 5 lb., 25 lb. kit	2 lb., 6 lb. kits	6 lb. kit	1 lb. kit	1 lb. kit, 6 lb. kit



Loctite® Nordbak® Pneu-Wear
Resists fine particle abrasion caused in pipe elbows of pneumatic conveyor systems. ABS Approved.



Loctite® Nordbak® Brushable Ceramic
Smooth, wear resistant, low friction coating to combat turbulence and cavitation on components such as pump housings and impellers. ABS Approved.



Loctite® Nordbak® Combo Bead Wearing Compound
Combines the abrasion resistance properties of both large and small ceramic beads and silicone carbide in a trowelable, non-sagging epoxy paste.



Loctite® Fixmaster® Flex Brushable
This two-part urethane brushes on to form abrasion and impact-resistant linings. ABS Approved. Use Flex accessories to properly etch, clean, and prime surfaces.



Loctite® Fixmaster® Flex 80 Putty
A trowelable, two-part urethane for rebuilding and repairing rubber parts and linings, providing impact, abrasion, and corrosion resistant protection. ABS Approved. Use Flex accessories to properly etch, clean, and prime surfaces.



Floor and Concrete Repair

- Chemical and corrosion resistance
- High impact resistance
- Bonds to concrete, wood, metals, brick, and other common building materials

FLOOR AND CONCRETE REPAIR

Floor Repairs

Helpful Hints:

- Vary consistency of Magna-Crete® for vertical applications
- Use Magna-Crete® for cold storage applications
- No concrete bonding agents required
- Use a backer rod when filling deep expansion joints

Extreme Chemical Resistance

Solution

High Performance Quartz

Color	Grey
Maximum Temperature	150°F (66°C)
Compressive Strength	12,000 psi
Working Time	45 min.
Functional Cure	24 hrs.
Chemical Resistance	Excellent
Available Sizes	42 lb. kit

Additional Products


Name	Available Colors	Sizes
Urethane Sealant	Limestone and Black	10.2 oz. Cartridge
Fixmaster® Magna-Crete® Activator	–	10 lb.



Loctite® Fixmaster® High Performance Quartz

A highly-filled, quartz epoxy system designed to protect old or new concrete from chemical attack. Provides a surface resistant to concentrated acids, alkalis, and solvents. Areas damaged by chemical attack may be resurfaced with HPQ. Easily applied, trowelable system that should be applied at a minimum 1/4" build to provide maximum chemical resistance.



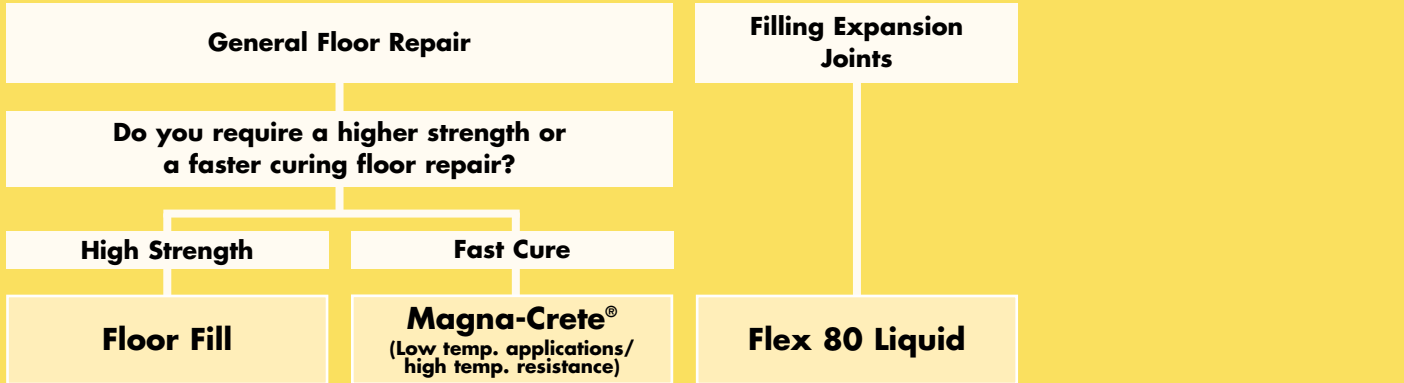

Grey	Grey	Black
225°F (107°C)	2,000°F (1,093°C)	180°F (82°C)
15,000 psi	13,000 psi	N.A.
40-60 min.	15 min.	20 min.
24 hrs.	1 hr.	8 hrs.
Good	Fair	Fair
10 lb. Kit, 40 lb. Kit	1 gallon kit, 5 gallon kit	1 lb. kit, 6 lb. kit



**Loctite® Fixmaster®
Floor Fill**

A three-component, self-leveling, non-shrinking epoxy floor repair system. 100% solids, epoxy-based system for repairing holes in floors, spalled areas, ramps, stairs, cracks in floors, and for use in grouting applications. Stronger than concrete, it bonds to almost any clean substrate and provides corrosion and chemical resistance.



**Loctite® Fixmaster®
Magna-Crete®**

This two-component magnesium phosphate cement sets rapidly and has a very high early strength. Ideal for road and aircraft runway repairs, which can typically be driven over after 45 minutes. It bonds to new and old concrete as well as most construction materials including wood, glass, and steel. No water additive, so it can be applied at temperatures as low as -15°F.



**Loctite® Fixmaster®
Flex 80 Liquid**

A castable two-part urethane for making molds, fixtures, expansion joints, and non-scratching holding fixtures.



Anti-Slip Flooring

- Chemical resistance
- Designed to increase the Coefficient of Friction (COF)
- Exceeds OSHA COF recommendations


ANTI-SLIP FLOORING

Anti-Slip Coatings

Helpful Hints:

- Most formulas can be rolled, sprayed, or trowelled
- Finished flooring easily cleaned with a biodegradable cleaner degreaser
- Remove any oil, grease, dirt, or water prior to application
- Test for the presence of water to determine if floor can be coated

Solution

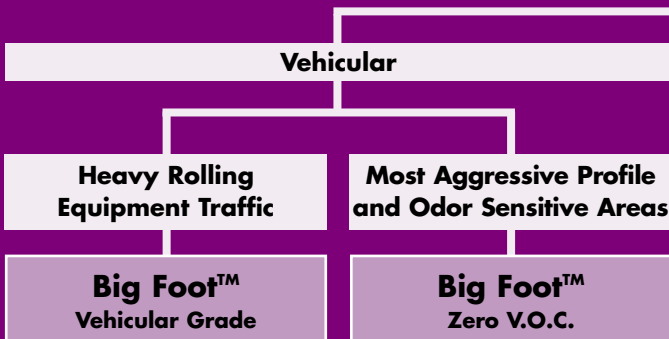

	Big Foot™ Vehicular Grade	Big Foot™ Zero V.O.C.
Color	Black, Grey, and Tile Red	Black and Grey
COF (Dry/Wet)	1.05/1.05	1.10/1.00
Coverage per Gallon (ft ² /meter ²)	40 ft ² (3.7m ²)	35 ft ² (3.3m ²)
Working Time	4 hrs.	1 hr.
Drying Time (Light Pedestrian Traffic/Heavy Pedestrian Traffic)	12/72 hrs.	24/72 hrs.
Available Sizes	1 gallon, 5 gallon kits	1 gallon, 5 gallon kits

Additional Products

Name	Used on or with
Big Foot™ Metal Primer	Metal
Big Foot™ Acrylic Primer	Acrylic Pedestrian Grade
Big Foot™ Primer/Sealer	Porous Surfaces (ex. Concrete, wood, tile)





Loctite® Big Foot™ Vehicular Grade

Withstands even the heaviest rolling equipment traffic. Resists liquids as harsh as jet fuels and hydraulic fluids. Superior adhesion forms a solid bond to metal, concrete, and wood.



Loctite® Big Foot™ Zero V.O.C.

This 100% reactive, solvent-free epoxy has the most aggressive profile in the Big Foot™ line. Use in odor-sensitive areas such as wineries, food processing plants, hospitals, or confined spaces.

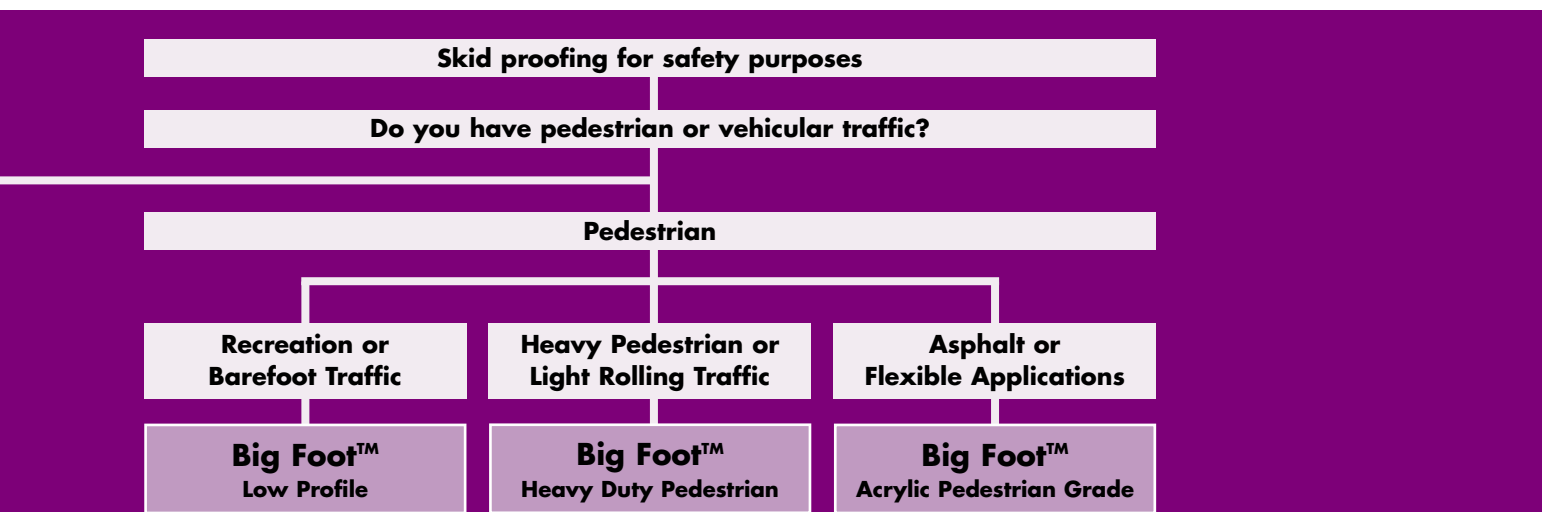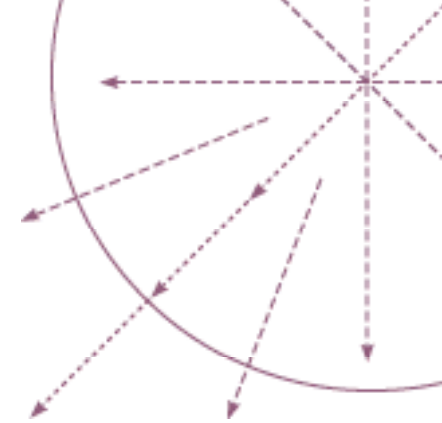

Black and Grey	Black and Grey	Black and Grey
0.78/0.86	1.17/1.00	1.30/0.90
90 ft² (8.4m²)	50 ft² (4.7m²)	70 ft² (6.5m²)
1 hr.	N.A.	N.A.
24/72 hrs.	12/72 hrs.	4/24 hrs.
1 gallon kit	1 gallon, 5 gallon kits	1 gallon kit



**Loctite® Big Foot™
Low Profile
Pedestrian Grade**

A two-component, water-borne epoxy for recreation and barefoot traffic areas.



**Loctite® Big Foot™
Heavy Duty
Pedestrian Grade**

For areas with heavy pedestrian or light rolling traffic. Ideal for ramps, walkways, locker rooms, stairs, and assembly areas.



**Loctite® Big Foot™
Acrylic Pedestrian Grade**

A single-component, elastomeric, anti-slip floor and deck coating for optimum adhesion to asphalt and flexible applications. Best for outdoor applications.



Grouting

- Chemical and corrosion resistance
- Self-leveling
- Stronger than concrete
- Bonds to concrete, wood, metals, brick, and other common building materials

GROUTING

Grouting

Helpful Hints:

- Use Fast Set Grout to set anchor bolts
- Replace traditional steel chocks with Marine Chocking for mounting equipment in the marine industry

Yes

Marine Chocking

Solution


Color	Green or Orange
Maximum Temperature	250°F (121°C)
Compressive Strength	22,000 psi
Working Time*	10-15 min.
Functional Cure	24 hrs.
Available Sizes	2 gallon kit

* Typical value @ 77°F (25°C)



Loctite® Fixmaster® Marine Chocking

Self-leveling, fast-curing, non-shrinking grout. Outstanding chemical and vibration resistance and compressive strength to withstand maximum loads. Approved by the American Bureau of Shipping.

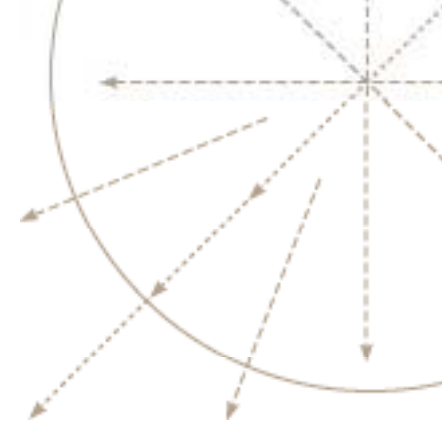

Is this a Marine Application?

No

Pour depth required?

Up to 1"

Up to 6"

Up to 18"

Fast Set Grout

Deep Pour Grout

Super Grout

Red

Black

Red

200°F (93°C)

225°F (107°C)

225°F (107°C)

14,500 psi

14,500 psi

12,900 psi

10 min.

30 min.

285 min.

12hrs.

24 hrs.

24 hrs.

2 gallon kit

5 gallon kit

5 gallon kit



**Loctite® Fixmaster®
Fast Set Grout**

Self-leveling, non-shrinking grout for installing machinery and setting anchor bolts. Cures quickly. Can be poured up to 1" thick. Compression strength and chemical resistance are superior to concrete. Forms strong bonds to old concrete and to itself.



**Loctite® Fixmaster®
Deep Pour Grout**

Aggregate-filled, epoxy system for pours up to 6" deep, including self-leveling applications under rails and sole plates. High strength material bonds to steel, concrete, and itself. Withstands high torque load.



**Loctite® Fixmaster®
Super Grout**

Designed for grouting up to 18" deep, including self-leveling applications under rails and sole plates. Super Grout is a 100% solids epoxy system that is non-shrinking, chemical and corrosion resistant, stronger than concrete, and withstands high torque loading.



Belt Repair

- Repair gouges, cuts, and worn edges on rubber belting
- Non-shrinking and unaffected by oil, grease, and water
- Excellent flexibility and elongation

BELT REPAIR

Conveyor Belt Repair

Helpful Hints:

- Rapid Rubber 400 ml cartridges and kit require Rapid Rubber Repair Gun, Part Number 39635
- Instant Belt Repair requires heat
- Instant Belt Repair can be applied at any temperature
- Use the recommended accessory products to ensure maximum adhesion and product reliability

Temporary

Instant
Belt Repair

Solution

Color	Amber
Working Time	N.A.
Tensile Strength	400 psi
Functional Cure	30 min.
Available Sizes	1 lb.


Additional Products

Name	Features
Fixmaster® Flex Rubber Primer	Promotes adhesion to rubber and urethane surfaces
Fixmaster® Etching Agent	Enhances bonds to natural, SBR and Butadiene rubber
Fixmaster® Flex Accelerator	Speeds the cure of Flex Urethanes
Fixmaster® Flex Cleaner	Cleans rubber, urethane or metal



Loctite® Fixmaster® Instant Belt Repair

A single-component, heat-curing material for fast, temporary belt repairs. Requires no priming. Equipment can be operated in 30 minutes.

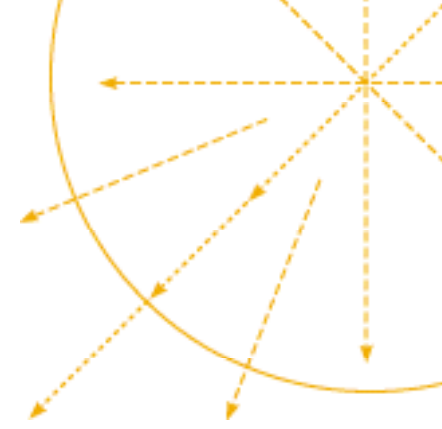

Is this a temporary or a long term repair?

Long Term

Do you require a fast return to service or a long working time?

Fast Return to Service

Longer Working Time

Rapid Rubber Repair

Flex Conveyor Belt Repair Kit

Black	Black
1 min.	10 min.
1,300 psi	1,500 psi
2 hrs.	8 hrs.
400 ml kit, 400 ml cart., 150 ml coaxial cart.	1 lb. kit



**Loctite® Fixmaster®
Rapid Rubber
Repair Urethane**

Our premium quality, belt repair product is designed to repair conveyor belts and other damaged rubber equipment quickly and easily. Repairs will have the same durability and flexibility as the belt. The 400 ml cartridge requires the use of a Rapid Rubber Repair Gun. Also available in a kit with etching agent and cleaner.



**Loctite® Fixmaster®
Flex Conveyor
Belt Repair Kit**

Makes long-lasting belt repairs. Recommended for applications where speed of application is not critical. Cures in 8-12 hours.



Lubricants

Oils, Greases, and Dry Film

- Temperature Resistance
- Thermal Stability
- Penetrate and free corroded assemblies

High Performance Lubrication

Solution	Dry Film Lubricant		Aerosol
	Moly Dry Film	Krytox® RFE Advanced PTFE Dry Lubricant	ViperLube™ High Performance Synthetic Grease
Base Oil	Molybdenum disulfide	PTFE [†]	PAO [†]
Viscosity	-	-	-
Temperature Range	-20°F to 750°F (-29°C to 398°C)	-15°F to 500°F (-26°C to 260°C)	-40°F to 500°F* (-40°C to 260°C)
4 Ball Wear²	-	-	-
Food Grade	-	-	NSF® H1
Available Sizes	16 oz. aerosol, 1.3 lb., 10 lb., 50 lb.	8 oz. aerosol	10.1 oz. aerosol

¹CST @ 40°C

²Four Ball Wear Scar, ASTM D-2266 @ 1 hr., 1200 RPM, 225°F (107°C), 20 Kg load, mm

*400°F - Continuous, 500°F - Intermittent

[†]PTFE=PolyTetraFlouroEthylene

PFPE=PerFlouroPolyEther

PAO=PolyAlphaOlefin

Additional Products

Name	Feature
Krytox® RFE Cleaner	Removes used or contaminated lubricants
Extreme Pressure Grease	NLGI 1
Gear, Chain and Cable Lubricant	Repels dirt, sand, and dust
Maintain™ Lubricant, Moisture Displacer & Rust Preventer	Close fitting parts
Hydraulic Jack Oil	Hydraulic units
Silicone Lubricant	Food processing
Penetrating Oil	Displaces moisture
Dielectric Grease	Electrical Equipment
Solvo-Rust® Super Penetrating Oil	Close fitting parts
White Lithium Grease	Metal to metal, metal to plastic
Food Grade Grease	Food Processing



Loctite® Moly Dry Film

Solid film lubricant for sliding surfaces and slow-moving parts. Temperature resistant up to 750°F (399°C) as a dry film lubricant, 2,400°F (1315°C) as an anti-seize. Won't squeeze out, burn off, or pick up dirt.




Loctite® Krytox® RFE Advanced PTFE Dry Lubricant

High performance, synthetic lubricant designed to provide long-lasting lubrication for parts that require a dry, thin lubricating film. RFE Advanced PTFE Dry Lubricant provides excellent lubrication properties over a broad temperature range.



Loctite® ViperLube™ High Performance Synthetic Grease

NLGI Grade 2/ Severe Duty GC-LB Grease provides protection against equipment exposed to a wide range of temperatures. Use as a lubricant and protective anti-rust film on bearings and machine parts, or as a release agent on gasket and seals. NSF® H1 rated for incidental food contact.

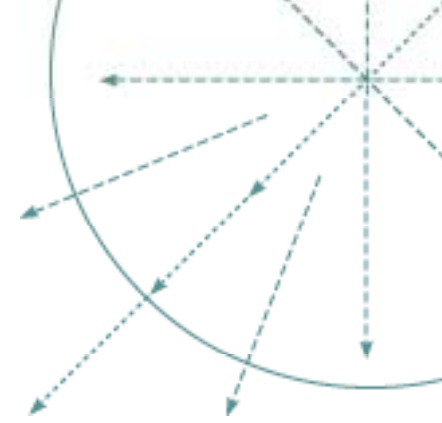

Do you need an aerosol, an oil, or a grease?

Oil		Grease		
		Is there direct contact with severe chemicals? i.e. chlorine, oxygen		
		Yes		No
ViperLube™ Synthetic Lightweight Oil (10w)	ViperLube™ Synthetic Gear Oil (90w)	Krytox® High Performance Lubricant	Krytox® RFE PFPE Lubricant	ViperLube™ High Performance Synthetic Grease
PAO†	PAO†	PFPE†	PFPE†	PAO†
ISO 32	ISO 220	240 CST†	240 CST†	240 CST†
45°F to 450°F (-42°C to 232°C)	-45°F to 450°F (-42°C to 232°C)	-15°F to 500°F (-26°C to 260°C)	-15°F to 500°F (-26°C to 260°C)	-40°F to 500°F* (-40°C to 260°C)
0.40	0.60	0.30	0.30	0.42
NSF® H1	NSF® H1	NSF® H2	NSF® H2	NSF® H1
1 gallon	1 gallon	2 oz. tube, 16 oz. cart.	2 oz. tube, 16 oz. pail, 16 oz. cart.	1cc tube, 0.42 oz., 3 oz., 400 g can, 14 oz. cart., 30 lb. pail



Loctite® ViperLube™ High Performance Lightweight Oil
10W (ISO 32) Oil reduces varnish and deposits, minimizing the need for replacement parts and maintenance. For use on hydraulic systems, rotary screw compressors, food processing machinery, bearings, chains, and valves. NSF® H1 rated for incidental food contact.



Loctite® ViperLube™ High Performance Synthetic Gear Oil
90W (ISO 220) gear oil extends equipment life, reduces oil changes and energy costs. Recommended for use on gear sets, bearings, circulating oil systems, chains, and worn gear units. NSF® H1 rated for incidental food contact.



Loctite® Krytox® RFE PFPE High Performance Lubricant
Synthetic grease provides long-lasting lubrication for all types of moving and/or sliding parts. Compatible with all plastics, elastomers, and metals. Non-flammable, chemically resistant and oxygen compatible.



Loctite® Krytox® RFE PFPE Lubricant
High performance synthetic grease formulated specifically for severe environments. Excellent lubrication properties over a broad temperature range. NLGI Grade 2.



Loctite® ViperLube™ High Performance Synthetic Grease
NLGI Grade 2/ Severe Duty GC-LB Grease provides protection against equipment exposed to a wide range of temperatures. Use as a lubricant and protective anti-rust film on bearings and machine parts, or as a release agent on gasket and seals. NSF® H1 rated for incidental food contact.




Lubrication

Anti-Seize

- Protect against rust, corrosion, seizing, and galling
- Provide lubrication in extreme environments

What type of Anti-Seize do you require?

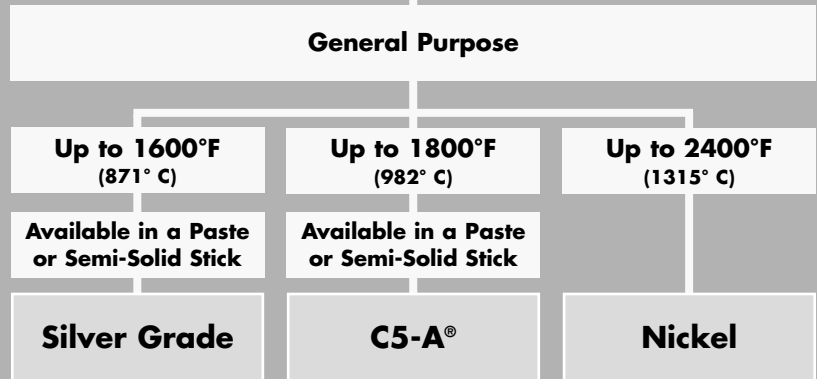


Solution

	Silver Grade	C5-A®	Nickel
Color	Silver	Copper	Silver
Solid Lubricating Agent	Graphite/Aluminum	Copper/Graphite	Nickel/Graphite
Torque Coefficient*	0.18	0.16	0.15
Temperature Range	-20°F - 1600°F (-29°C - 870°C)	-20°F - 1800°F (-29°C - 982°C)	-20°F - 2400°F (-29°C - 1315°C)

* K value on steel nuts and bolts


Additional Products

Name	Max Temp	Features
White Hi-Temp	2000°F (1093°C)	Non-Metallic, High Temp
N-1000	1800°F (892°C)	Power Plant, Copper Based
N-5000	2400°F (1315°C)	Power Plant, Nickel Based
N-5000 High Performance	2400°F (1315°C)	Power Plant, Nickel Based, High Lubricity
N-7000	2400°F (1315°C)	Power Plant, Metal Free
Moly-50	750°F (399°C)	Thread Lubricant
Graphite-50	900°F (482°C)	Electrically Conductive Nonmetallic
Moly Paste	750°F (399°C)	Withstands extreme pressure, heavy loads



Loctite® Silver Grade Anti-Seize

Heavy-duty, temperature-resistant, petroleum-based lubricant compound fortified with graphite and metallic flake. Inert, will not evaporate or harden in extreme cold or heat. For use in assemblies up to 1600°F (871°C). ABS Approved. Tested to MIL-PRF-907E.



Loctite® C5-A® Copper Based Anti-Seize

Exclusive formula suspends copper and graphite in a high-quality grease. Protects metal parts from rust, corrosion, galling, and seizing at temperatures to 1800°F (982°C). Tested to MIL-PRF-907E.




Loctite® Nickel Anti-Seize


Copper-free. Recommended for stainless steel and other metal fittings. For preventing corrosion, seizing, and galling in harsh, chemical environments, and temperatures to 2400°F (1315°C). ABS Approved.




Stainless Steel and Titanium Applications	Soft Metal Applications	Incidental Food Contact	Water Resistant
Heavy Duty	Zinc	Food Grade	Marine Grade
Black	Grey	White	Black
Graphite/Calcium Fluoride	Zinc	White Lubricating Solids	Calcium Sulfonate
0.16	0.15	0.16	0.18
-20°F - 2400°F (-29°C - 1315°C)	-20°F - 750°F (-29°C - 399°C)	-20°F - 750°F (-29°C - 399°C)	-20°F - 2400°F (-29°C - 1315°C)




Loctite® Heavy Duty Anti-Seize
Metal-free. Excellent lubricity. Provides outstanding lubrication to all metals including stainless steel, aluminum, and soft metals up to 2400°F (1315°C).



Loctite® Zinc Anti-Seize
Protects aluminum and ferrous surfaces from seizure and corrosion up to 750°F (399°C).



Loctite® Food Grade Anti-Seize
Prevents seizure, galling, and friction in stainless steel and other metal parts up to 750°F (399°C).



Loctite® Marine Grade Anti-Seize
Formulated to protect assemblies exposed directly or indirectly to fresh and salt water, Marine Grade Anti-Seize works especially well in high humidity conditions. It has excellent lubricity, superior water wash-out water spray resistance, and prevents galvanic corrosion. ABS Approved.




Surface Protection and Rust Prevention

- Stabilize existing rust
- Guard against corrosion
- Prevent electro-chemical corrosion
- Increase belt friction

SURFACE PROTECTION AND RUST PREVENTION

Surface Treatment and Rust Prevention

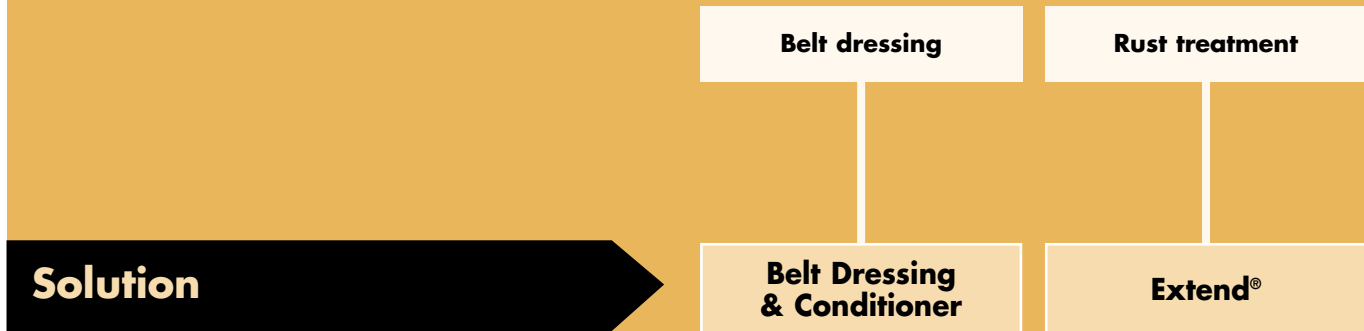

Description	Liquid spray	Rust Converter
Color	Colorless	Matte black
Temperature Range	Up to 200°F (93°C)	Up to 250°F (121°C)
Dry Time	N.A.	30 min.
Available Sizes	12 oz. aerosol	10.5 oz. aerosol, 1 qt., 1 gallon, 5 gallon

Additional Products	
Name	Size
Color Guard® Primer	1 gallon
Color Guard® Thinner	1 gallon
Chemical Resistant Coating	12 lb. kit



Loctite® Belt Dressing & Conditioner

Recommended to prevent slipping and increase friction for all types of belts. It extends belt life. Penetrates the cord fibers of "V" belts to restore pliability and flexibility. Eliminates squeaking and glazing.



Loctite® Extend® Rust Treatment

Converts existing rust into a stable base. Cured product acts as a primer ready for painting. Protects surfaces from corrosion. Use on metal pipes, valves, fittings, storage tanks, fences, guard rails, conveyors, construction and agricultural equipment. ABS Approved.



Corrosion protection

General purpose

Cathodic protection

Undercoating

Non Drying

Color Coding

Cold Galvanizing Compound

Rubberized Undercoating

Maxi-Coat

Color-Guard®

Zinc spray

Rubberized spray

Waxy film

Rubber coating

Grey

Black

Brown

Red, Yellow, Blue, Black

Up to 400°F (204°C)

Up to 200°F (93°C)

Up to 200°F (93°C)

Up to 200 °F (93°C)

15 min.

20 min.

N.A.

4 hrs.

15 oz. aerosol

16 oz. aerosol

12 oz. aerosol,
1 gallon can

11 oz. aerosol,
14.5 fl. oz. can, 1 gallon can



Loctite® Cold Galvanizing Compound

Sprays on metal surfaces to prevent corrosion even when the surface is scratched. Ideal touch-up for welded seams. Highly resistant to salt corrosion and water. Not resistant to acid or alkaline solutions. Contains no ozone-depleting compounds.



Loctite® Rubberized Undercoating

This heavy-duty undercoating seals, protects, and insulates. Rubberized for maximum durability.



Loctite® Maxi-Coat

Heavy-duty coating provides long-term protection for metal parts, equipment, and machinery. Forms a protective, waxy film which seals out moisture, air, acid, and other corrosive elements. Great for protecting parts in storage. Removable.



Loctite® Color Guard® Tough Rubber Coating

Inhibits rust and corrosion. Seals, insulates, and identifies almost any material in minutes. Creates a non-slip gripping surface. Rubber coating won't crack or chip. Acid and alkali resistant. Dip, spray, or brush to apply. Suggested applications: tools, metal, electrical connections, masonry, wood, conveyors, glass, rope, fabric. Now in a toluene free formulation.



Parts and Surface Cleaning

■ Clean and degrease work surfaces and parts

PARTS AND SURFACE CLEANING

Parts and Surface Cleaners

Electrical Contacts

Gasket Removing

Solution

Electrical Contact & Parts Cleaner

Non-Flammable Electrical Contact Cleaner

Chisel® Gasket Remover

Chisel® MC-FREE Gasket Remover

Available Sizes

11 oz. aerosol

15 oz. aerosol

18 oz. aerosol

15.25 oz. aerosol

Additional Products

Name	Size
Pro Strength Varnish Remover	12 oz. Aerosol
Multi-Purpose Glass Cleaner	18.75 oz. Aerosol
Paint Stripper	18 oz. Aerosol
Non-Chlorinated Parts Cleaner	14.75 oz. Aerosol



Loctite® Electrical Contact & Parts Cleaner

Fast-evaporating cleaner removes grease, oil, and other contaminants from electrical parts and mechanical equipment. Contains no CFCs or HCFCs and is safe on most plastics. Non-conductive and non-corrosive.



Loctite® Non-Flammable Electrical Contact Cleaner

Removes grease, oil, and other contaminants from electrical parts to prevent contact failure. Dries residue-free in seconds. Non-conductive, non-flammable. Contains no CFCs or Class I ODCs. Contains HCFC-141 b. May attack some sensitive plastics.





Loctite® Chisel® Gasket Remover

Removes gaskets from any type of assembly in 10 to 15 minutes. Prepares metal parts for new gaskets, eliminating scraping and sanding. Works on wood; non-corrosive on aluminum. Not for use with plastics, linoleum, or synthetic fibers.



Loctite® Chisel® MC-FREE Gasket Remover

Free of Methylene Chloride, Chisel® MC-FREE has a foaming action that lifts off gaskets from any type of assembly in minutes. Performs better than Methylene Chloride formulations on silicone gaskets and removes most spray paints from steel panels in less than 30 seconds. Suitable for wood and plaster. Not for use on plastics, linoleum, or synthetic fibers.

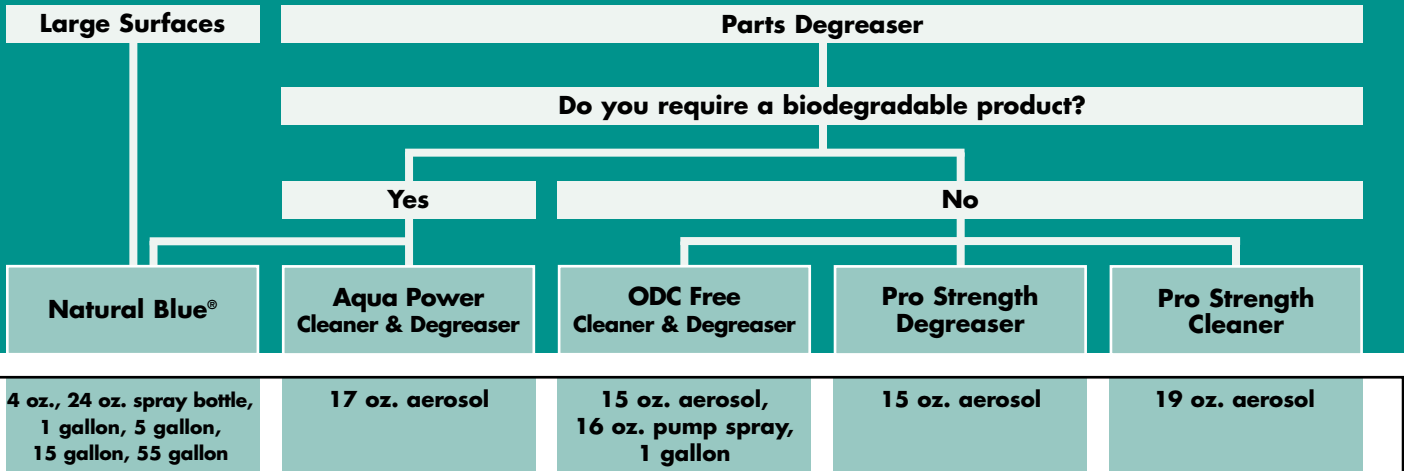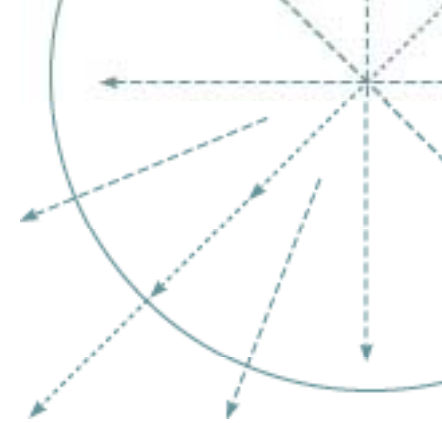


Loctite® Natural Blue® Cleaner & Degreaser

Biodegradable, all-purpose, industrial strength, concentrated cleaner and degreaser. Can be economically diluted with water. Natural Blue is formulated for wipe down, pressure spraying, and immersion cleaning processes at room temperature or heated. Non-flammable and non-toxic. Contains no ODCs. Available in pine scent or unscented formulas.



Loctite® Aqua Power™ Cleaner & Degreaser

Penetrates, dissolves, and removes dirt and oil. Fast drying and residue-free. Environmentally friendly product is biodegradable, has low toxicity, no ODCs, and is non-corrosive/non-caustic.



Loctite® ODC-Free Cleaner & Degreaser

A non-aqueous, hydrocarbon-based solvent designed for cleaning and degreasing surfaces to be bonded with adhesives, as well as for general purpose industrial cleaning. Safe on aluminum, rubber, and most plastics, and will not cause flash rusting on water-sensitive parts. Dries residue free. Contains no ozone-depleting compounds. (Formerly referenced as 7070).



Loctite® Pro Strength Degreaser

Quickly dissolves and removes grease, oil and dirt from iron, steel, aluminum, magnesium, copper, rubber, plastic, and concrete. Rinses off with water.



Loctite® Pro Strength Parts Cleaner

Aggressively penetrates, dissolves and removes oil and grease from parts. Dries quickly with no residue. Contains no ODCs.



Hand Cleaners

- Fortified with emollients to soothe and protect hands
- Fast, effective, industrial hand cleaners

HAND CLEANERS

Hand Cleaners

Antiseptic Agents

For Ink, Paint or Resin

Towels

Solution

Original Cream

Paint and Resin Removing

Industrial Hand Wipes

Scent

Clean Mint

Fresh

Citrus

Available Sizes

14 oz. plastic tub,
4.25 lb. plastic can

15 fl. oz. bottle,
1 gallon bottle w/pump

75 count canister,
130 count bucket

Additional Products

Dispensers and Accessories

Replacement Plastic Pump
for 1 gallon pump bottles

Stainless Steel Pump Dispenser
for 1 gallon pump bottles

Wire Wall Bracket
for 1 gallon pump bottles

Push Type Wall Mount Universal Dispenser
for 4.25 lb., 4.5 lb. and flat top gallons

Loctite® Original Cream Hand Cleaner


Formulated to remove tough grease and grime, while premium skin conditioners and antiseptic agents keep sensitive hands protected and conditioned. Works on grease, paint, gasket and tile cements, heavy fuel oil, asphalt, and more.

Loctite® Paint and Resin Removing Hand Cleaner with Fine Pumice

Specially formulated to quickly and safely remove paints, sealants and adhesives, especially those with a urethane base. Unlike lacquer thinner, turpentine, kerosene, or gasoline that can be hazardous to your health when used as a hand cleaner, this cleaner is fortified with lanolin, jojoba, Vitamin E, aloe vera, and glycerin that's gentle on your skin. Wipes or rinses away thoroughly with no sticky oil or residue.

Loctite® Industrial Hand Wipes

Pre-moistened with a powerful citrus scented formula, each 9.5" x 12" wipe is abrasive enough to scrub off the toughest grease and grime without scratching hands. Quick and easy to use, no rinsing, no drying, no residue left behind. Perfect for industrial and commercial working hands in the painting, printing, maintenance, transportation, and construction industries.

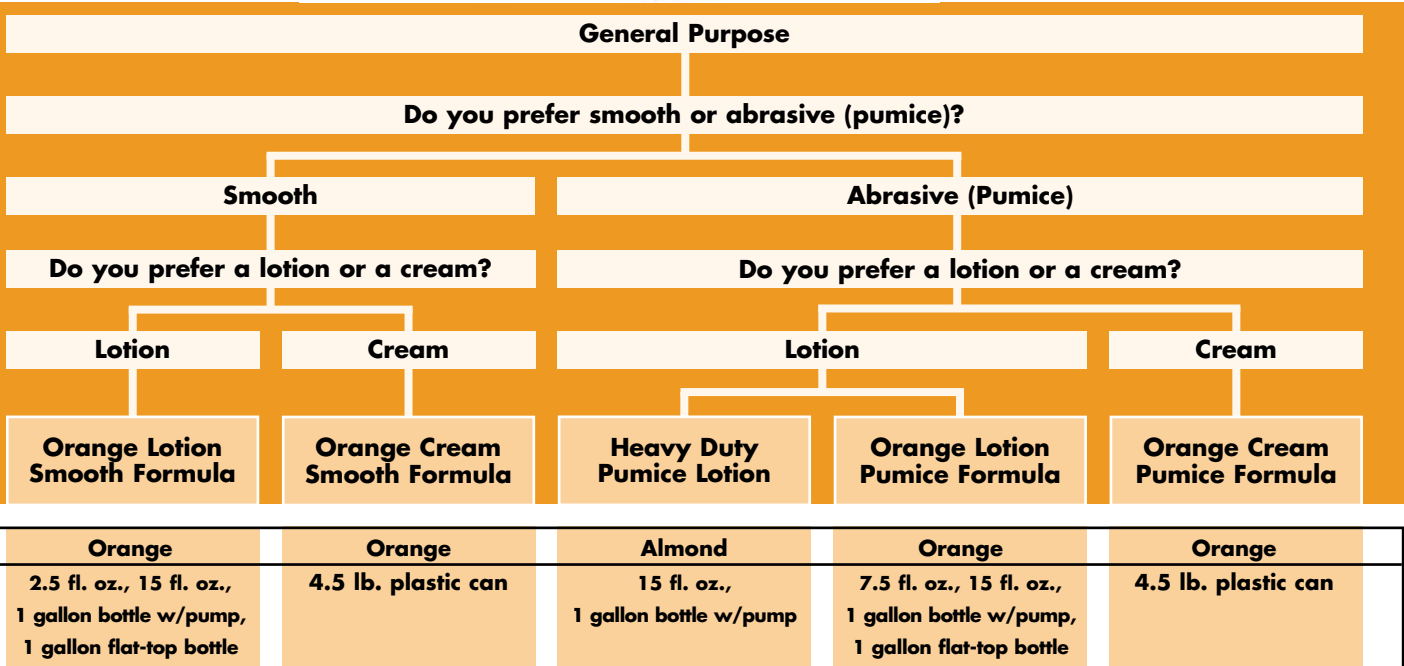

Loctite® Orange Lotion Hand Cleaner Smooth Formula

Contains premium-grade cleansing agents that quickly dissolve dirt, grease, resin, ink, paint, glue, rubber gasket and tile cements, and other stubborn soils. Citrus-based, smooth formula is pH balanced and fortified with skin conditioners lanolin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and protect raw, rough hands. Formulated for those who prefer a hand cleaner without pumice, or for those with extra sensitive skin.

Loctite® Orange Cream Hand Cleaner Smooth Formula

Contains all the benefits of our smooth lotion, this cream formula also has a thicker consistency and the package can be wall mounted in our convenient Universal dispenser. Ideal for those who prefer to “scoop” hand cleaner from a tub.

Loctite® Heavy Duty Pumice Lotion Hand Cleaner

A thick, rich, water-soluble lotion formulated to remove the toughest industrial soils without the harsh solvents used in other heavy duty hand cleaners. The fine-ground pumice allows for deeper cleaning and quickly emulsifies dirt, grease, inks, tar, asphalt, oils, lubricants, paints, industrial carbon, and other heavy duty soils. Fortified with antiseptic agents, glycerin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and condition hands without an oily or sticky feel.

Loctite® Orange Lotion Hand Cleaner Pumice Formula

Contains premium-grade cleansing agents that quickly dissolve the toughest soils. The added pumice safely and effectively removes dirt, grease, resin, ink, paint, glue, rubber gasket and tile cements, and many other hard to remove soils. This citrus-based, pH balanced formula is fortified with the skin conditioners lanolin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and protect raw, rough hands.

Loctite® Orange Cream Hand Cleaner Pumice Formula

Contains all the benefits of our lotion pumice formula in a thicker consistency. The package can be wall-mounted in our convenient Universal dispenser. Ideal for those who prefer to “scoop” hand cleaner from a tub.




Bonding

- Assemble parts quickly and easily
- Repair broken parts
- Dissimilar parts can be bonded

BONDING

Is your bond filling a void and does it need to be machinable?

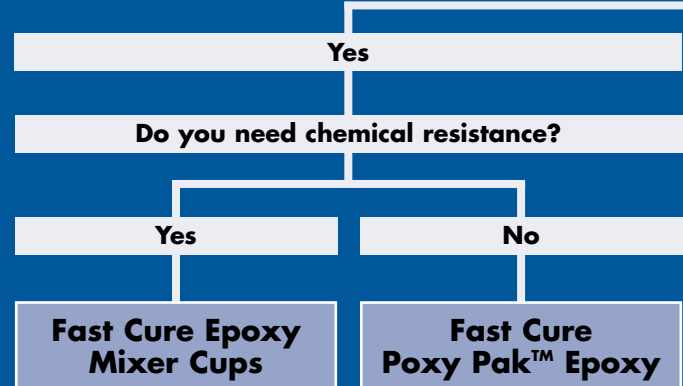

Solution

	Fast Cure Epoxy Mixer Cups	Fast Cure Poxy Pak™ Epoxy
Color	Grey	Clear
Fixture Time	10 min.	4-6 min.
Temperature Resistance	Up to 180°F (82°C)	Up to 300°F (149°C)
Available Sizes	Can of 10 - 4 g cups, Can of 10 - 1 oz. cups	1 fl. oz. syringe

Additional Products

Product	Features
Black Contact Adhesive	Flexible, resists gasolines, waterproof
Contact Adhesive	Flexible, withstands freezing temperatures
All Purpose Spray Adhesive	Water Resistant Spray
Max Strength Headliner Adhesive	Resists extreme weather conditions
Fixmaster® 4 Minute Epoxy	Translucent, fast curing
Fixmaster® General Purpose Epoxy Mixing Cups	Single use, bonds porous and non-porous surfaces
Fixmaster® High Performance Epoxy	Fiberglass reinforced, shock resistant





Loctite® Fixmaster® Fast Cure Epoxy Mixer Cups

Premeasured epoxy mixer cups. Bonds in 5-15 minutes. Excellent chemical resistance. Fills porosities and can be used to build up worn parts. Ideal for bonding glass, hard plastics, rubber, and metal.



Loctite® Fixmaster® Fast Cure Poxy Pak™ Epoxy

This fast-cure, high-strength, thick liquid reaches handling strength in 4-6 minutes. Bonds virtually any material to repair, fill, and seal holes, cracks, and worn surfaces. ABS Approved.

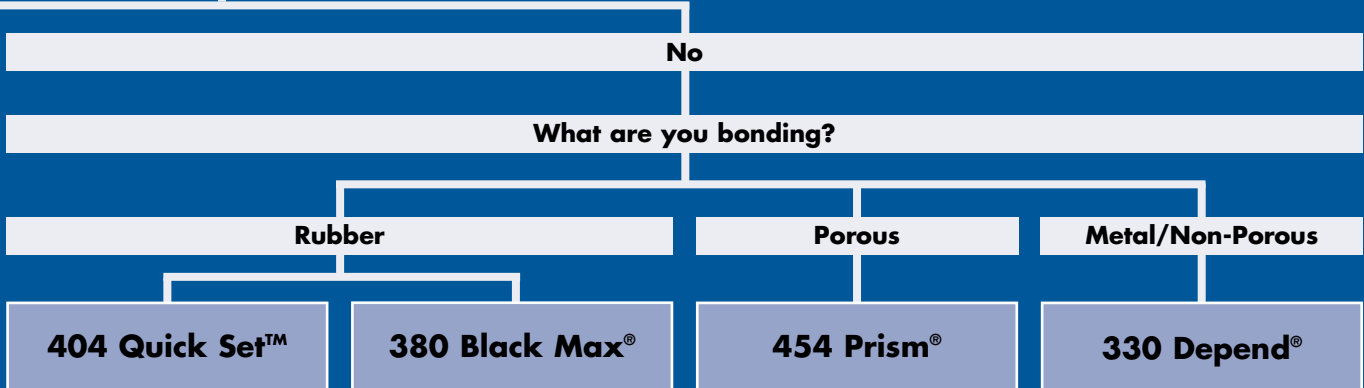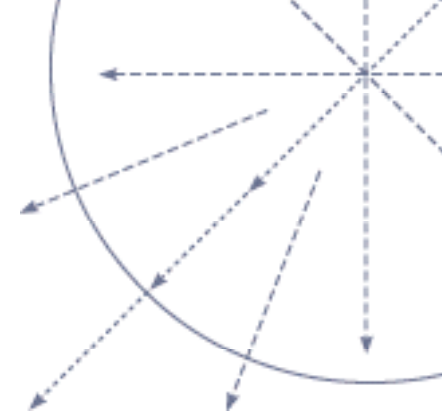

Clear	Black	Clear	Amber
20-40 seconds	90-150 seconds	15-90 seconds	1-2 min.
Up to 180°F (82°C)	Up to 225°F (107°C)	Up to 180°F (82°C)	Up to 250°F (121°C)
1/3 oz., 4 oz. bottle	3 g. tube, 1 oz. bottle	3 g., 20 g tubes	25 ml. syringe, 250 ml. tube



Loctite® 404 Quick Set™ Instant Adhesive

This general-purpose Quick Set™ instant adhesive liquid is the one adhesive everyone needs in their toolbox for general maintenance and repair. It sets instantly. No clamping, no mixing, no waiting. Keep it handy to bond just about anything in an instant. Bonds rubber to rubber, i.e. making O-rings. ABS Approved.



Loctite® 380 Black Max® Instant Adhesive

For parts that encounter shock, vibration, or thermal cycling, 380 is the instant adhesive choice. This black, toughened cyanoacrylate adhesive uses elastomers to withstand impact and challenging environmental conditions. Seals as well as bonds. Works especially well bonding rubber to metal.



Loctite® 454 Prism® Instant Adhesive

The ideal adhesive for porous substrates, 454 is a clear gel adhesive. As a surface insensitive cyanoacrylate, it is ideal for difficult-to-bond substrates, including rough, porous, and acidic surfaces. Need to bond something on a vertical surface. This gel formulation won't run off before you put substrates together. ABS Approved.



Loctite® 330 Depend® Adhesive

330 Depend® sets in just minutes to a tough acrylic adhesive with high peel and impact strength. Bonds almost all combinations of materials, including glass. No-mix kit includes activator and adhesive.



Kits, Specialty, and Emergency Repair Products

- Enables rapid repair of damaged or burst pipes, conveyor or drive belts, and similar rubber-based components
- Will seal leaks in tanks and other containment vessels in addition to repairing metal parts
- Includes a kit for repairing or replacing damaged o-ring seals

Emergency Repair

Helpful Hints:

- Use Rapid Rubber Repair Gun with Rapid Rubber Repair Kit

Tool Kits

Solution

Quick Service Tool Kit

Maintenance Tackle Box

Reliability Tool Box



Loctite® Quick Service Tool Kit

This compact kit contains everything needed to solve the most common mechanical failures. Contains 242® Medium, 10 ml; 262 High Strength Threadlockers, 10 ml; 7649 Primer/Activator, 4.5 oz.; Prism® 454 Instant Adhesive Gel, 3 g; Quick Metal® 660 Retaining Compound, 6 ml; 565 Thread Sealant, 50 ml; 587 Blue Silicone Gasket Maker, 70 ml; 518 Gasket Eliminator®, 50ml.




Loctite® Maintenance Tackle Box

The Maintenance Tackle Box is designed to fit in a mechanic's tool chest. Contains 242® Threadlocker, 50 ml; 262 Permanent TL, 50 ml; 609 Retaining Compound, 50 ml; 660 Quick Metal®, 50 ml; 565 Thread Sealant, 50 ml; 518 Gasket Eliminator®, 50 ml; 598 High Performance Black Silicone, 70 ml; 7649 Primer N, 25 g; Do it Right User's Guide.



Loctite® Reliability Tool Box

Designed for the Manufacturing Reliability program, this tool box contains 222 Low Strength Threadlocker, 10ml; 242® Removable Threadlocker, 50ml; 262 High Strength Threadlocker, 50ml; 290 Wicking Threadlocker, 50ml; 7649 Primer N Aerosol, 0.88 oz.; 565 PST® Thread Sealant, 50ml; 545 Hydraulic/Pneumatic Thread Sealant, 50ml; 518 Gasket Eliminator®, 50ml; Instant Gasket, 7oz.; 609 Retaining Compound, 10ml; 660 Quick Metal®, 50ml; Loctite® 55 Pipe Sealing Cord.

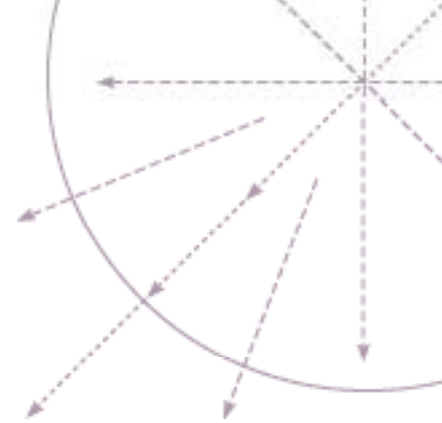

**Replace or repair
o-ring seals**

Repair stripped threads

Stop pipe leaks

**Fix damaged
belts, conveyors,
rubber parts**

O-Ring Kit

Form-A-Thread®

Pipe Repair Kit

**Rapid Rubber
Repair Kit**



Loctite® O-Ring Making Kit

Eliminates the need for an inventory of different sized O-rings. Joints resist water and oil and are as strong as the rubber itself. Contains 3 ft. lengths of common diameters of Buna N cord, Quick Set™ 404 Instant Adhesive, O-ring fixture, blade, water-proofing solution, and cleanup solution.



Loctite® Form-A-Thread® Stripped Thread Repair Kit

Permanently repairs stripped threads and fasteners in five minutes (up to SAE Grade 5 English and 8.8 metric). Allows up to 128 lb. torque and 300°F. Resists most shop fluids.



Loctite® Pipe Repair Kit

No tools required. Cures in 30 minutes. Easy-to-use repair kit. Use for temporary/medium term repair of leaking pipes, and reinforcement of weak areas. Kit contains protective gloves, Loctite® Metal Magic Steel™ Stick, and urethane-impregnated fiberglass tape.



Loctite® Fixmaster® Rapid Rubber Repair Kit

Fast, long-term repairs to conveyor belts. Remains flexible. Easy application. This kit is a fast-curing, two-part flexible adhesive/sealant system in an easy-to-use pack. Operating temperature up to 80 °C. Applications include repair of worn and torn conveyor belts and other rubber equipment.



Accessories

■ **Loctite® accessories** are specially designed to make application and use of **Loctite® products** fast, precise, clean, and economical.

ACCESSORIES




Loctite® 97001 Peristaltic hand-pump

This hand-held applicator is a low-cost, precision bottle top applicator that mounts easily on the top of any Loctite 50 ml or 250 ml bottle.



Loctite® 96121 Phenolic Roller and 96153 Bristle Roller

These rollers are recommended for applying the Big Foot™ range of flooring compounds. The Phenolic Roller gives a rough surface and the Bristle Roller is used for applying primers and sealers.



Loctite® 96131 Mixer Blade

For use with all 1 gallon kits of Big Foot™ flooring compounds.



Loctite® 983531 Dual Cartridge Applicator

Two-component epoxies are dispensed through handheld, manually operated, meter-mix dispensers. These dispensers provide a convenient, cost-effective method to apply product with minimal waste.




Loctite® 39635 Fixmaster® Rapid Rubber Repair Gun

Easy to use applicator for the Rapid Rubber Repair Kit.



Loctite® 39633 Fixmaster® Rapid Rubber Repair Static Mixers

These mixing nozzles are for use with Rapid Rubber Repair Urethane in the 400 ml cartridge. Packaged in bags of 6.

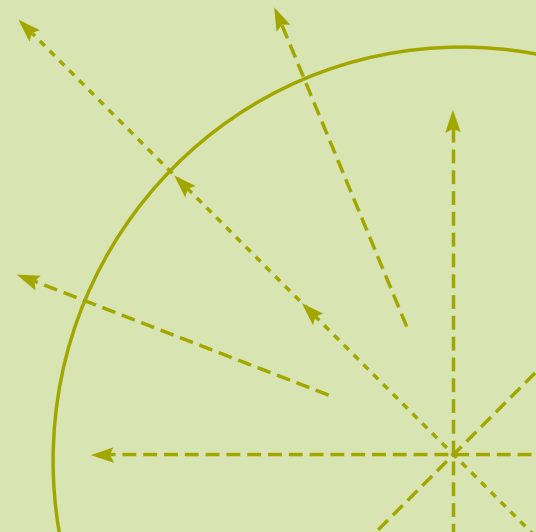



Name: _____

Area: _____



Check the box for items you need

Item No.	Loctite Product	Pkg. Size	Item No.	Loctite Product	Pkg. Size	Item No.	Loctite Product	Pkg. Size
Threadlocking			Anti-Slip Flooring			<input type="checkbox"/> 34663 Chisel® MC-FREE 15.25 oz		
<input type="checkbox"/> 29031	290 – Green	50 ml	<input type="checkbox"/> 96251	Big Foot™ Vehicular Grade – Grey	1 gal	<input type="checkbox"/> 82249	Natural Blue®	24 oz
<input type="checkbox"/> 22231	222MS – Purple	50 ml	<input type="checkbox"/> 39915	Big Foot™ Zero VOC – Grey	1 gal	<input type="checkbox"/> 30569	Aqua Power™ Cleaner Degreaser	17 oz
<input type="checkbox"/> 24231	242® – Blue	50 ml	<input type="checkbox"/> 95641	Big Foot™ Low Profile	1 gal	<input type="checkbox"/> 22355	ODC Free Cleaner Degreaser	15 oz
<input type="checkbox"/> 24078	243 – Blue	50 ml	<input type="checkbox"/> 96261	Big Foot™ Heavy Duty – Grey	1 gal	<input type="checkbox"/> 30521	Pro Strength Degreaser	15 oz
<input type="checkbox"/> 26231	262 – Red	50 ml	<input type="checkbox"/> 95591	Big Foot™ Acrylic – Grey	1 gal	<input type="checkbox"/> 30548	Pro Strength Cleaner	19 oz
<input type="checkbox"/> 37087	248 – Blue Stick	19 g				Hand Cleaning		
<input type="checkbox"/> 37686	268 – Red Stick	19 g	Grouting			<input type="checkbox"/> 01013	Loctite® Original Cream	14 oz
Thread Sealing			<input type="checkbox"/> 97572	Marine Chocking – Green	2 gal	<input type="checkbox"/> 65218	Paint and Resin Removing	1 gal
<input type="checkbox"/> 35082	55 Pipe Sealing Cord	5,700 in.	<input type="checkbox"/> 39637	Fast Set Grout	2 gal	<input type="checkbox"/> 34943	Industrial Hand Wipes	75 count
<input type="checkbox"/> 80725	No More Leaks™	2 oz	<input type="checkbox"/> 99545	Deep Pour Grout	5 gal	<input type="checkbox"/> 23218	Loctite® Orange Smooth Lotion	1 gal
<input type="checkbox"/> 54531	545	50 ml	<input type="checkbox"/> 33510	Super Grout	5 gal	<input type="checkbox"/> 33406	Loctite® Orange Smooth Cream	4.5 lb
<input type="checkbox"/> 56531	565 PST®	50 ml	Belt Repair			<input type="checkbox"/> 21218	Loctite® Heavy Duty Pumice	1 gal
<input type="checkbox"/> 56747	567 PST®	50 ml	<input type="checkbox"/> 97033	Instant Belt Repair	1 lb	<input type="checkbox"/> 25218	Loctite® Orange Pumice Lotion	1 gal
<input type="checkbox"/> 37127	561 PST® Stick	19 g	<input type="checkbox"/> 96677	Rapid Rubber Repair	400 ml	<input type="checkbox"/> 35406	Loctite® Orange Pumice Cream	4.5 lb
Gasketing			<input type="checkbox"/> 98693	Flex Conveyor Belt Repair Kit	1 lb	Bonding		
<input type="checkbox"/> 51831	518 Gasket Eliminator®	50 ml	Lubrication – Anti-Seize			<input type="checkbox"/> 21426	Fast Cure Epoxy Mixer Cups	10 - 1 oz
<input type="checkbox"/> 30526	Hi-Tack™ Gasket Sealant	9 oz	<input type="checkbox"/> 76764	Silver Grade	1 lb	<input type="checkbox"/> 81120	Poxy Pak™	1 oz
<input type="checkbox"/> 51031	510 Gasket Eliminator®	50 ml	<input type="checkbox"/> 51007	C5-A® Copper	1 lb	<input type="checkbox"/> 46548	404 Quick Set™	4 oz
<input type="checkbox"/> 59675	Superflex™ Red High Temp	300 ml	<input type="checkbox"/> 77164	Nickel	1 lb	<input type="checkbox"/> 38050	380 Black Max®	1 oz
<input type="checkbox"/> 58775	587 Blue High Performance	300 ml	<input type="checkbox"/> 51606	Heavy Duty	1 lb	<input type="checkbox"/> 45440	454 Prism®	20 g
<input type="checkbox"/> 30507	Instant Gasket	7 oz	<input type="checkbox"/> 39901	Zinc	1 lb	<input type="checkbox"/> 20251	330 Depend Adhesive®	25 ml
Retaining			<input type="checkbox"/> 51168	Food Grade	8 oz	Kits, Specialty and Emergency Repair Products		
<input type="checkbox"/> 66040	660 Quick Metal®	50 ml	<input type="checkbox"/> 34395	Marine Grade	8 oz	<input type="checkbox"/> 00101	Quick Service Tool Kit	
<input type="checkbox"/> 60931	Retaining Compound 609	50 ml	<input type="checkbox"/> 37229	C-5A® Copper Stick	20 g	<input type="checkbox"/> 33486	Maintenance Tackle Box	
<input type="checkbox"/> 62040	Retaining Compound 620	50 ml	<input type="checkbox"/> 37230	Silver Grade Stick	20 g	<input type="checkbox"/> 31362	Reliability Tool Box	
<input type="checkbox"/> 68035	Retaining Compound 680	50 ml	Lubricants – Oil, Greases, and Dry Film			<input type="checkbox"/> 00112	O-Ring Kit	
<input type="checkbox"/> 21441	Retaining Compound 603	50 ml	<input type="checkbox"/> 39895	Moly Dry Film	12 oz	<input type="checkbox"/> 28654	Form-A-Thread®	
Metal Rebuilding and Shaft Repair			<input type="checkbox"/> 30138	Krytox® RFE Dry Lubricant	8 oz	<input type="checkbox"/> 96321	Pipe Repair Kit	2" x 6"
<input type="checkbox"/> 97483	Steel Liquid	1 lb	<input type="checkbox"/> 29709	Krytox® High Performance Lub.	16 oz	<input type="checkbox"/> 96673	Rapid Rubber Repair Kit	
<input type="checkbox"/> 99913	Steel Putty	1 lb	<input type="checkbox"/> 29710	Krytox® RFE PFPE Lubricant	2 oz	<input type="checkbox"/> 30396	Empty Black Toolbox	
<input type="checkbox"/> 39917	Fast Set Steel Putty	1 lb	<input type="checkbox"/> 36788	ViperLube™ Lightweight Oil	1 gal	<input type="checkbox"/> 30397	Empty Clear Tacklebox	
<input type="checkbox"/> 98853	Metal Magic Steel™	4 oz	<input type="checkbox"/> 36787	ViperLube™ Gear Oil	1 gal	Accessories		
<input type="checkbox"/> 97453	Aluminum Liquid	1 lb	<input type="checkbox"/> 36782	ViperLube™ Grease Cartridge	14 oz	<input type="checkbox"/> 97001	Peristaltic Hand-pump	
<input type="checkbox"/> 97463	Aluminum Putty	1 lb	<input type="checkbox"/> 36783	ViperLube™ Grease Can	1 lb	<input type="checkbox"/> 96121	Phenolic Roller	
<input type="checkbox"/> 97473	Superior Metal	1 lb	<input type="checkbox"/> 36786	ViperLube™ Grease Aerosol	11 oz	<input type="checkbox"/> 96153	Bristle Roller	
Wear Prevention and Rebuild			Surface Protection and Rust Prevention			<input type="checkbox"/> 96131	Mixing Blade	
<input type="checkbox"/> 99813	Wearing Compound	5 lb	<input type="checkbox"/> 30527	Belt Dressing and Conditioner	12 oz	<input type="checkbox"/> 983531	Dual Cartridge Applicator	
<input type="checkbox"/> 39918	High Impact Wearing Compound	25 lb	<input type="checkbox"/> 75448	Extend®	1 gal	<input type="checkbox"/> 39635	Fixmaster® Rapid Rubber Repair Gun	
<input type="checkbox"/> 98383	Pneu-Wear	3 lb	<input type="checkbox"/> 82039	Cold Galvanizing Compound	15 oz	<input type="checkbox"/> 39633	Fixmaster® Rapid Rubber Repair Static Mixers	
<input type="checkbox"/> 98733	Brushable Ceramic – Grey	2 lb	<input type="checkbox"/> 30538	Rubberized Undercoating	16 oz	Primers		
<input type="checkbox"/> 96303	Combo Bead Wearing Compound	6 lb	<input type="checkbox"/> 51211	Maxi-Coat	16 oz	<input type="checkbox"/> 21348	Primer N	4.5 oz.
<input type="checkbox"/> 97401	Flex Brushable	1 lb	<input type="checkbox"/> 34983	Color Guard® – Blue	1 gal	<input type="checkbox"/> 96132	Bigfoot™ Metal Primer	1 gal
<input type="checkbox"/> 97423	Flex 80 Putty	1 lb	Parts and Surface Cleaning			<input type="checkbox"/> 95581	Bigfoot™ Acrylic Primer	1 gal
Floor and Concrete Repair			<input type="checkbox"/> 25791	Electrical Contact and Parts	11 oz	<input type="checkbox"/> 94142	Bigfoot™ Primer/Sealer	1 gal
<input type="checkbox"/> 96495	High Performance Quartz	42 lb	<input type="checkbox"/> 24379	Non-Flammable Electrical Contact Cleaner	15 oz			
<input type="checkbox"/> 99361	Floor Fill	10 lb	<input type="checkbox"/> 79040	Chisel® Gasket Remover	18 oz			
<input type="checkbox"/> 95551	Magna-Crete®	1 gal						
<input type="checkbox"/> 97413	Flex 80 Liquid	1 lb						

NEED IT NOW!



Name: _____

Area: _____

Reliability Improvement Suggestion

1. Problem Equipment _____ Department or Area _____

Describe problem including failing components: _____

How often does this happen? _____ Times per month _____ Times per year

Describe negative impact: _____

Describe your intended actions including products to be used: _____

Necessary products issued? Yes No Need Loctite rep help? Yes No

2. Problem Equipment _____ Department or Area _____

Describe problem including failing components: _____

How often does this happen? _____ Times per month _____ Times per year

Describe negative impact: _____

Describe your intended actions including products to be used: _____

Necessary products issued? Yes No Need Loctite rep help? Yes No

Additional Training Needed

Topics (Check appropriate boxes)

Comments

- Mechanical Basics & Failure Root Causes _____
- Rebuild/Resurface Shafts Wear Prevention _____
- Machine Base Grouting _____
- Belt Jointing & Repair _____
- Floor Repair & Resurface _____
- Anti-Slip Safety Flooring _____
- Corrosion Protection (tanks, decking, etc.) _____

Training Critique

Check appropriate boxes

Great

O.K.

Poor

- I learned useful information and proactive techniques for my job Great O.K. Poor
- The instructor was well informed and his style made it easy to learn Great O.K. Poor
- The examples helped me to understand where I can help increase reliability Great O.K. Poor
- The demos and visual aids were used effectively and helped me learn Great O.K. Poor
- The reference handouts are on target and will be helpful reminders Great O.K. Poor

Length of class Too Long Just right Too Short

Pace of class Too Fast Just Right Too Slow

Comments: _____

Product Ordering Information



■ Search by Loctite Product number on these pages.

Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page
00101	Quick Service Tool Kit		36	29710	Krytox® RFE PFPE Lubricant	2 oz.	24
00112	O-Ring Making Kit		37	29711	Krytox® RFE PFPE High Performance Lubricant	2 oz.	24
01013	Original Cream Hand Cleaner	14 oz.	32	30138	Krytox® RFE Advanced PTFE Dry Lubricant	8 oz. aerosol	24
01406	Original Cream Hand Cleaner	4.25 lb.	32	30287	Retaining Compound 660 Quick Metal® Press Fit Repair	250 ml	10
18581	5699 RTV Grey Silicone Gasket Maker	300 ml	8	30507	Instant Gasket	7 oz.	9
18718	5699 RTV Grey Silicone Gasket Maker	70 ml	8	30509	Instant Gasket	5 oz.	9
20162	ODC-Free Cleaner & Degreaser	16 fl. oz.	4, 6, 8, 31	30510	Gasket Sealant #1	1.5 oz.	8
20251	Depend® 330 No-Mix Adhesive Kit	25 ml	35	30511	Gasket Sealant #1	3 oz.	8
20252	Depend® 330 No-Mix Adhesive Kit	250 ml	35	30512	Gasket Sealant #1	11 oz.	8
20279	Fragrance-Free Natural Blue® Cleaner & Degreaser	55 gal.	31	30513	Gasket Sealant #2	1.5 oz.	8
21116	Heavy Duty Pumice Lotion Hand Cleaner	15 fl. oz.	33	30514	Gasket Sealant #2	3 oz.	8
21218	Heavy Duty Pumice Lotion Hand Cleaner	1 gal.	33	30515	Gasket Sealant #2	11 oz.	8
21347	Primer N 7649 (Acetone)	25 g	4, 6	30516	Aviation Gasket Sealant	1 pt.	8
21348	Primer N 7649 (Acetone)	4.5 oz.	4, 6	30517	Aviation Gasket Sealant	0.25 pt.	8
21425	Fixmaster® Fast Cure Epoxy Mixer Cups	10 - .2 fl. oz. cups	34	30518	Superflex® Blue RTV Silicone Adhesive Sealant	12 oz.	8
21426	Fixmaster® Fast Cure Epoxy Mixer Cups	10 - 1 oz. cups	34	30521	Pro Strength Degreaser	15 oz. aerosol	31
21427	Fixmaster® General Purpose Epoxy Mixer Cups	10 - .12 fl. oz. cups	34	30522	Hydraulic Jack Oil	1 qt.	24
21434	Threadlocker 277 High Strength/Large Threads	10 ml	4	30523	Hydraulic Jack Oil	1 gal.	24
21440	Retaining Compound 603 Oil Tolerant	10 ml	11	30524	Hi-Tack Gasket Sealant	.25 pt.	8
21441	Retaining Compound 603 Oil Tolerant	50 ml	11	30525	Hi-Tack Gasket Sealant	1 pt.	8
21442	Retaining Compound 603 Oil Tolerant	250 ml	11	30526	Hi-Tack Gasket Sealant	9 oz.	8
22041	Threadlocker 220 Medium Strength/Wicking	250 ml	4	30527	Belt Dressing & Conditioner	12 oz. aerosol	28
22221	Threadlocker 222MS Low Strength/Small Screw	10 ml	5	30529	Pro Strength Varnish Remover	12 oz. aerosol	30
22231	Threadlocker 222MS Low Strength/Small Screw	50 ml	5	30530	White Lithium Grease	1.5 oz.	24
22241	Threadlocker 222MS Low Strength/Small Screw	250 ml	5	30533	Superflex® Blue RTV Silicone Adhesive Sealant	300 ml	8
22355	ODC-Free Cleaner & Degreaser	15 oz.	4, 6, 8, 31	30534	Thread Sealant with PTFE	.25 pt.	6
23104	Orange Lotion Hand Cleaner (Smooth Formula)	1 gal. flat-top	33	30536	Dielectric Grease	0.33 oz.	24
23108	Orange Lotion Hand Cleaner (Smooth Formula)	7.5 fl. oz.	33	30537	Contact Adhesive	5 fl. oz.	34
23116	Orange Lotion Hand Cleaner (Smooth Formula)	15 fl. oz.	33	30538	Rubberized Undercoating	16 oz. aerosol	29
23218	Orange Lotion Hand Cleaner (Smooth Formula)	1 gal.	33	30539	Extend® Rust Treatment	10.5 oz. aerosol	28
23811	Fragrance-Free Natural Blue® Cleaner & Degreaser	1 gal.	31	30540	Black Contact Adhesive	5 fl. oz.	34
24077	Threadlocker 243 Oil Resistant/Medium Strength	10 ml	5	30541	Superflex® Blue RTV Silicone Adhesive Sealant	7.25 oz.	8
24078	Threadlocker 243 Oil Resistant/Medium Strength	50 ml	5	30542	5920 RTV Copper Silicone Gasket Maker	70 ml	8
24079	Threadlocker 243 Oil Resistant/Medium Strength	250 ml	5	30543	White Lithium Grease	10.75 oz. aerosol	24
24221	Threadlocker 242® Removable	10 ml	5	30544	All Purpose Spray Adhesive	10.5 oz.	34
24231	Threadlocker 242® Removable	50 ml	5	30545	Non-Chlorinated Parts Cleaner	14.75 oz. aerosol	30
24241	Threadlocker 242® Removable	250 ml	5	30546	Multi-Purpose Glass Cleaner	18.75 oz. aerosol	30
24379	Non-Flammable Electrical Contact Cleaner	15 oz. aerosol	30	30548	Pro Strength Parts Cleaner	19 oz. aerosol	31
25104	Orange Lotion Hand Cleaner (Fine Pumice Formula)	1 gal. flat-top	33	30556	Pipe Joint Compound	.25 pt.	6
25108	Orange Lotion Hand Cleaner (Fine Pumice Formula)	7.5 fl. oz.	33	30557	Pipe Joint Compound	1 pt.	6
25116	Orange Lotion Hand Cleaner (Fine Pumice Formula)	15 fl. oz.	33	30560	Superflex® Blue RTV Silicone Adhesive Sealant	80 ml	8
25218	Orange Lotion Hand Cleaner (Fine Pumice Formula)	1 gal.	33	30561	Thread Sealant with PTFE	1 pt.	6
25791	Electrical Contact & Parts Cleaner	11 oz. aerosol	30	30562	Superflex® Clear RTV Silicone Adhesive Sealant	7.25 oz.	8
26221	Threadlocker 262 Permanent	10 ml	5	30563	Superflex® Black RTV Silicone Adhesive Sealant	7.25 oz.	8
26231	Threadlocker 262 Permanent	50 ml	5	30564	Superflex® Red High Temp RTV Silicone Adhesive Sealant	7.25 oz.	9
26241	Threadlocker 262 Permanent	250 ml	5	30565	Aqua Power™ Cleaner & Degreaser	17 oz. aerosol	31
27240	Threadlocker 272 High Temp/High Strength	50 ml	4	30567	587 RTV Blue Silicone Gasket Maker	8.75 oz.	9
27270	Threadlocker 272 High Temp/High Strength	250 ml	4	30615	Krytox® RFE Cleaner	10 oz. aerosol	24
27731	Threadlocker 277 High Strength/Large Threads	50 ml	4	30684	Instant Gasket	4 oz.	9
27741	Threadlocker 277 High Strength/Large Threads	250 ml	4	31360	Krytox® RFE PFPE Lubricant	16 lb.	25
28654	Form-A-Thread® Stripped Thread Repair Kit	4.8 ml	37	31361	Krytox® RFE PFPE Lubricant	16 oz.	25
28753	Thread Sealant 564 Lower Strength	6 ml	6	31362	Reliability Tool Box		36
28754	Thread Sealant 564 Lower Strength	50 ml	6	32429	Thread Sealant 545 Hydraulic/Pneumatic	10 ml	7
28755	Thread Sealant 564 Lower Strength	250 ml	6	32525	Threadlocker 2760 High Strength Primerless	10 ml	4
29021	Threadlocker 290 Wicking Grade	10 ml	4	32526	Threadlocker 2760 High Strength Primerless	50 ml	4
29031	Threadlocker 290 Wicking Grade	50 ml	4	32527	Threadlocker 2760 High Strength Primerless	250 ml	4
29041	Threadlocker 290 Wicking Grade	250 ml	4	33058	Depend® 330 No-Mix Adhesive	250 ml	35
29709	Krytox® RFE PFPE High Performance Lubricant	16 oz.	24	33064	Depend® 330 No-Mix Adhesive	300 ml	35

Product Ordering Information

Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page
33241	Thread Sealant 567 PST® High Temperature	16 oz.	7	39643	C5-A® Copper Based Anti-Seize	1 lb.	26
33406	Orange Cream Hand Cleaner (Smooth Formula)	4.5 lb.	33	39647	C5-A® Copper Based Anti-Seize	8 oz.	26
33486	Maintenance Tackle Box		36	39895	Moly Dry Film	12 oz. aerosol	24
33510	Fixmaster® Super Grout	5 gal.	21	39896	Moly Dry Film	1.3 lb.	24
33946	Threadlocker 2440 Primerless/Medium Strength	10 ml	4	39897	Moly Dry Film	10 lb.	24
33947	Threadlocker 2440 Primerless/Medium Strength	50 ml	4	39898	Moly Dry Film	50 lb.	24
33948	Threadlocker 2440 Primerless/Medium Strength	250 ml	4	39901	Zinc Anti-Seize	1 lb.	27
33957	Big Foot™ Vehicular Grade, Tile Red	5 gal.	18	39915	Big Foot™ Zero V.O.C. Grey	1 gal.	18
34018	598 RTV Black Silicone Gasket Maker	.5 ml	8	39916	Urethane Sealant - grey	10.2 oz.	16
34026	Marine Grade Anti-Seize	1 lb.	27	39917	Fixmaster® Fast Set Steel Putty	1 lb.	12
34395	Marine Grade Anti-Seize	8 oz.	27	39918	Nordbak® High Impact Wearing Compound	25 lb.	14
34517	White High Temp Anti-Seize	8 oz.	26	45404	Prism® 454 Surface Insensitive Instant Adhesive Gel	3 g	35
34518	White High Temp Anti-Seize	1 lb.	26	45440	Prism® 454 Surface Insensitive Instant Adhesive Gel	20 g	35
34663	Chisel® MC-Free Gasket Remover	15.25 oz. aerosol	30	46548	Quick Set™ 404 Instant Adhesive	4 oz.	35
34894	Color Guard® Black Tough Rubber Coating	11 oz. aerosol	29	46551	Quick Set™ 404 Instant Adhesive	1/3 oz.	35
34895	Color Guard® Blue Tough Rubber Coating	11 oz. aerosol	29	51001	C5-A® Copper Based Anti-Seize	1 oz.	26
34896	Color Guard® Red Tough Rubber Coating	11 oz. aerosol	29	51002	C5-A® Copper Based Anti-Seize	4 oz.	26
34897	Color Guard® Yellow Tough Rubber Coating	11 oz. aerosol	29	51003	C5-A® Copper Based Anti-Seize	12 oz. aerosol	26
34943	Industrial Hand Wipes	75 count	32	51004	C5-A® Copper Based Anti-Seize	13 oz. cartridge	26
34944	Industrial Hand Wipes	130 count	32	51005	C5-A® Copper Based Anti-Seize	10 oz.	26
34979	Color Guard® Black Tough Rubber Coating	14.5 fl. oz.	29	51006	C5-A® Copper Based Anti-Seize	1 lb.	26
34980	Color Guard® Black Tough Rubber Coating	1 gal.	29	51007	C5-A® Copper Based Anti-Seize	1 lb.	26
34982	Color Guard® Blue Tough Rubber Coating	14.5 fl. oz.	29	51008	C5-A® Copper Based Anti-Seize	2.5 lb.	26
34983	Color Guard® Blue Tough Rubber Coating	1 gal.	29	51009	C5-A® Copper Based Anti-Seize	8 lb.	26
34985	Color Guard® Red Tough Rubber Coating	14.5 fl. oz.	29	51010	C5-A® Copper Based Anti-Seize	25 lb.	26
34986	Color Guard® Red Tough Rubber Coating	1 gal.	29	51011	C5-A® Copper Based Anti-Seize	42 lb.	26
34988	Color Guard® Yellow Tough Rubber Coating	14.5 fl. oz.	29	51031	Flange Sealant 510 Gasket Eliminator®	50 ml	9
34989	Color Guard® Yellow Tough Rubber Coating	1 gal.	29	51041	Flange Sealant 510 Gasket Eliminator®	250 ml	9
34994	Primer for Color Guard® Tough Rubber Coating	1 gal.	28	51048	Moly Paste	8 oz.	26
34995	Thinner for Color Guard® Tough Rubber Coating	1 gal.	28	51049	Moly Paste	1 lb.	26
35082	55 Pipe Sealing Cord	5,700 in.	6	51050	Moly Paste	12 oz. aerosol	26
35406	Orange Cream Hand Cleaner (Fine Pumice Formula)	4.5 lb.	33	51084	Graphite - 50 Anti-Seize	1 lb.	26
36045	Big Foot™ Acrylic Pedestrian Grade, Black	1 gal.	19	51094	Moly - 50 Anti-Seize	1 lb.	26
36132	Urethane Sealant - black	10.2 oz.	16	51102	Nickel Anti-Seize	1 lb.	26
36334	Fixmaster® Magna-Crete® Activator	10 lb.	16	51115	N-1000 High Purity Anti-Seize	8 oz.	26
36354	Heavy Duty Anti-Seize	8 lb.	25	51116	N-1000 High Purity Anti-Seize	1 lb.	26
36780	ViperLube™ High Performance Synthetic Grease	1 cc	25	51117	N-1000 High Purity Anti-Seize	2 lb.	26
36781	ViperLube™ High Performance Synthetic Grease	3 oz.	25	51144	C5-A® Copper Based Anti-Seize	4 oz.	26
36782	ViperLube™ High Performance Synthetic Grease	14 oz.	25	51145	Moly Paste	15 lb.	26
36783	ViperLube™ High Performance Synthetic Grease	400 g	25	51146	C5-A® Copper Based Anti-Seize	425 lb.	26
36784	ViperLube™ High Performance Synthetic Grease	.42 oz.	25	51147	C5-A® Copper Based Anti-Seize	8 oz.	26
36786	ViperLube™ High Performance Synthetic Grease	11 oz. aerosol	25	51152	Nickel Anti-Seize	8 lb.	26
36787	ViperLube™ High Performance Synthetic Gear Oil	1 gal.	25	51168	Food Grade Anti-Seize	8 oz.	27
36788	ViperLube™ High Performance Synthetic Lightweight Oil	1 gal.	25	51170	Food Grade Anti-Seize	2 lb.	27
37061	ViperLube™ High Performance Synthetic Grease	5 gal.	25	51171	Food Grade Anti-Seize	40 lb.	27
37087	248 Blue Threadlocker Stick	19 g	5	51211	Maxi-Coat	12 oz. aerosol	29
37127	561 PST® Thread Sealant Stick	19 g	7	51213	Maxi-Coat	1 gal.	29
37229	C5-A® Copper Anti-Seize Stick	20 g	26	51221	Penetrating Oil	12 oz. aerosol	24
37230	Silver Grade Anti-Seize Stick	20 g	26	51242	Extreme Pressure Grease	14.5 oz.	24
37312	Max Strength Headliner Adhesive	16.75 oz.	34	51243	N-5000 High Purity Anti-Seize	8 oz.	26
37684	248 Blue Threadlocker Stick	9 g	5	51245	N-5000 High Purity Anti-Seize	8 lb.	26
37685	268 Red Threadlocker Stick	9 g	5	51246	N-5000 High Purity Anti-Seize	2 lb.	26
37686	268 Red Threadlocker Stick	19 g	5	51252	Food Grade Grease	14.5 oz.	24
38050	Black Max® 380 Toughened Instant Adhesive	1 oz.	35	51269	N-5000 High Purity Anti-Seize	1 lb.	26
39633	Fixmaster® Rapid Rubber Repair Static Mixers	6 nozzles	38	51270	N-7000 Metal Free Anti-Seize	1 lb.	26
39635	Fixmaster® Rapid Rubber Repair Gun		22, 38	51272	N-7000 Metal Free Anti-Seize	8 oz.	26
39636	Fixmaster® Flex Cleaner	4 fl. oz.	22	51273	N-7000 Metal Free Anti-Seize	2 lb.	26
39637	Fixmaster® Fast Set Grout	2 gal.	21	51277	C5-A® Copper Based Anti-Seize	7 g	26



Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page
51286	Nickel Anti-Seize	12 oz. aerosol	26	77175	Nickel Anti-Seize	5 gal.	26
51299	C5-A® Copper Based Anti-Seize	2 g	26	79040	Chisel® Gasket Remover (Methylene Chloride)	18 oz.	8, 30
51346	N-5000 High Purity Anti-Seize	1 oz.	26	80032	Penetrating Oil	1 pt.	24
51360	Silicone Lubricant	5.3 oz.	24	80206	Silver Grade Anti-Seize	1 gal.	26
51387	Superflex® Non-Corrosive RTV Silicone	80 ml	8	80209	Silver Grade Anti-Seize	4 oz.	26
51388	Superflex® Non-Corrosive RTV Silicone	300 ml	8	80724	No More Leaks™ Plastic Pipe Sealant	7 fl. oz.	7
51572	High Performance N-5000 High Purity Anti-Seize (max lubrication)	1 lb.	26	80725	No More Leaks™ Plastic Pipe Sealant	2 fl. oz.	7
51605	Heavy Duty Anti-Seize	9 oz.	27	80726	No More Leaks™ Plastic Pipe Sealant	1 pt.	7
51606	Heavy Duty Anti-Seize	1.2 lb.	27	80964	Gasket Sealant #2	5 gal.	8
51607	Heavy Duty Anti-Seize	2.3 lb.	27	81120	Fixmaster® Fast Cure Poxypak™ Epoxy (Clear Liquid)	1 oz.	34
51608	Heavy Duty Anti-Seize	45 lb.	27	81204	Maintain™ Lubricant, Moisture Displacer & Rust Preventer	16 oz. aerosol	24
51609	Heavy Duty Anti-Seize	1 oz.	27	81246	Silicone Lubricant	13 oz. aerosol	24
51817	Flange Sealant 518 Gasket Eliminator®	6 ml	8,9	81251	Gear, Chain and Cable Lubricant	12 oz. aerosol	24
51831	Flange Sealant 518 Gasket Eliminator®	50 ml	8,9	81252	Solvo-Rust® Super Penetrating Oil	13 oz. aerosol	24
54531	Thread Sealant 545 Hydraulic/Pneumatic Sealant	50 ml	7	81716	Paint Stripper	18 oz. aerosol	30
54541	Thread Sealant 545 Hydraulic/Pneumatic Sealant	250 ml	7	82039	Cold Galvanizing Compound	15 oz. aerosol	29
56531	Thread Sealant 565 PST® Controlled Strength	50 ml	7	82046	5920 RTV Copper Silicone Gasket Maker	300 ml	8
56541	Thread Sealant 565 PST® Controlled Strength	250 ml	7	82093	Fixmaster® Underwater Repair Epoxy	4 oz.	12
56707	Thread Sealant 567 PST® High Temperature	6 ml	7	82244	Natural Blue® Cleaner & Degreaser	4 fl. oz.	31
56747	Thread Sealant 567 PST® High Temperature	50 ml	7	82249	Natural Blue® Cleaner & Degreaser	24 fl. oz.	31
56765	Thread Sealant 567 PST® High Temperature	250 ml	7	82251	Natural Blue® Cleaner & Degreaser	1 gal.	31
58730	587 RTV Blue Silicone Gasket Maker	70 ml	9	82253	Natural Blue® Cleaner & Degreaser	5 gal.	31
58775	587 RTV Blue Silicone Gasket Maker	300 ml	9	82254	Natural Blue® Cleaner & Degreaser	15 gal.	31
58791	587 RTV Blue Silicone Gasket Maker	17 liters	9	82255	Natural Blue® Cleaner & Degreaser	55 gal.	31
59330	Superflex® Black RTV Silicone Adhesive Sealant	80 ml	8	82279	Superflex® Red High Temp RTV Silicone Adhesive Sealant	12 oz.	9
59375	Superflex® Black RTV Silicone Adhesive Sealant	300 ml	8	82480	H.V.A.C. Blue Pipe Joint Compound	.25 pt.	6
59430	Superflex® White RTV Silicone Adhesive Sealant	80 ml	8	82481	H.V.A.C. Blue Pipe Joint Compound	1 pt.	6
59475	Superflex® White RTV Silicone Adhesive Sealant	300 ml	8	82518	Superflex® White RTV Silicone Adhesive Sealant	7.25 oz.	8
59530	Superflex® Clear RTV Silicone Adhesive Sealant	80 ml	8	90123	Hand Cleaner Dispensers and Accessories - Stainless Steel Pump		32
59575	Superflex® Clear RTV Silicone Adhesive Sealant	300 ml	8	90126	Hand Cleaner Dispensers and Accessories - Plastic Pump		32
59630	Superflex® Red High Temp RTV Silicone Adhesive Sealant	80 ml	9	90128	Hand Cleaner Dispensers and Accessories - Wall Bracket		32
59675	Superflex® Red High Temp RTV Silicone Adhesive Sealant	300 ml	9	94142	Big Foot™ Primer / Sealer	1 gal.	18
59830	598 RTV Black Silicone Gasket Maker	70 ml	8	95140	Hand Cleaner Dispensers and Accessories - Push type, wall mounted		32
59866	598 RTV Black Silicone Gasket Maker	8.75 oz.	8	95551	Fixmaster® Magna-Crete®	1 gal.	17
59875	598 RTV Black Silicone Gasket Maker	300 ml	8	95555	Fixmaster® Magna-Crete®	5 gal.	17
59891	598 RTV Black Silicone Gasket Maker	49 lb.	8	95581	Big Foot™ Acrylic Primer	1 gal.	18
60921	Retaining Compound 609 General Purpose	10 ml	11	95591	Big Foot™ Acrylic Pedestrian Grade, Grey	1 gal.	19
60931	Retaining Compound 609 General Purpose	50 ml	11	95631	Big Foot™ Low Profile Pedestrian Grade, Black	1 gal.	19
60941	Retaining Compound 609 General Purpose	250 ml	11	95641	Big Foot™ Low Profile Pedestrian Grade, Grey	1 gal.	19
62015	Retaining Compound 620 High Temperature	10 ml	11	96092	Nordbak® Chemical Resistant Coating	12 lb.	14, 28
62040	Retaining Compound 620 High Temperature	50 ml	11	96102	Fixmaster® Marine Chocking, Orange	2 gal.	20
62070	Retaining Compound 620 High Temperature	250 ml	11	96121	Big Foot™ Phenolic Roller Cores	4 pcs./case	38
65116	Paint & Resin Removing Hand Cleaner with Fine Pumice	15 fl. oz.	32	96131	Mixer Blades	1 pc.	38
65218	Paint & Resin Removing Hand Cleaner with Fine Pumice	1 gal.	32	96132	Big Foot™ Metal Primer	1 gal.	18
66010	Retaining Compound 660 Quick Metal® Press Fit Repair	6 ml	10	96153	Big Foot™ Bristle Rollers	2 pcs./case	38
66040	Retaining Compound 660 Quick Metal® Press Fit Repair	50 ml	10	96211	Big Foot™ Heavy Duty Pedestrian Grade, Black	1 gal.	19
68015	Retaining Compound 680 High Strength/High Viscosity	10 ml	11	96215	Big Foot™ Heavy Duty Pedestrian Grade, Black	5 gal.	19
68035	Retaining Compound 680 High Strength/High Viscosity	50 ml	11	96221	Big Foot™ Vehicular Grade, Black	1 gal.	18
68060	Retaining Compound 680 High Strength/High Viscosity	250 ml	11	96225	Big Foot™ Vehicular Grade, Black	5 gal.	18
75430	Extend® Rust Treatment	1 qt.	28	96231	Big Foot™ Zero V.O.C., Black	1 gal.	18
75448	Extend® Rust Treatment	1 gal.	28	96235	Big Foot™ Zero V.O.C., Black	5 gal.	18
75465	Extend® Rust Treatment	5 gal.	28	96245	Big Foot™ Zero V.O.C., Grey	5 gal.	18
76732	Silver Grade Anti-Seize	8 oz.	26	96251	Big Foot™ Vehicular Grade, Grey	1 gal.	18
76759	Silver Grade Anti-Seize	12 oz. aerosol	26	96255	Big Foot™ Vehicular Grade, Grey	5 gal.	18
76764	Silver Grade Anti-Seize	1 lb.	26	96261	Big Foot™ Heavy Duty Pedestrian Grade, Grey	1 gal.	19
76775	Silver Grade Anti-Seize	5 gal.	26	96265	Big Foot™ Heavy Duty Pedestrian Grade, Grey	5 gal.	19
77124	Nickel Anti-Seize	8 oz.	26	96303	Nordbak® Combo Bead Wearing Compound	6 lb.	15
77164	Nickel Anti-Seize	1 lb.	26	96321	Pipe Repair Kit, 2" x 6' Tape		37

Product Ordering Information

■ Search by Loctite Product name on these pages.

Part Number	Product Name	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
96322	Pipe Repair Kit, 4" x 12' Tape		37	55 Pipe Sealing Cord	35082	5,700 in.	6
96332	Nordbak® Ultra High Temperature Pneu-Wear	25 lb.	14	561 PST™ Thread Sealant Stick	37127	19 g	7
96363	Nordbak® Fast Cure Pneu-Wear	6 lb.	14	5699 RTV Grey Silicone Gasket Maker	18581	300 ml	8
96373	Nordbak® Fast Cure Wearing Compound	6 lb.	14	5699 RTV Grey Silicone Gasket Maker	18718	70 ml	8
96392	Nordbak® Ultra High Temperature Wearing Compound	25 lb.	14	587 RTV Blue Silicone Gasket Maker	30567	8.75 oz.	9
96433	Nordbak® High Temperature Brushable Ceramic	2 lb.	14	587 RTV Blue Silicone Gasket Maker	58730	70 ml	9
96443	Nordbak® Brushable Ceramic - White	2 lb.	15	587 RTV Blue Silicone Gasket Maker	58775	300 ml	9
96495	Fixmaster® High Performance Quartz	42 lb.	16	587 RTV Blue Silicone Gasket Maker	58791	17 liters	9
96583	Fixmaster® Wet Surface Repair Putty	1 lb.	12	5920 RTV Copper Silicone Gasket Maker	30542	70 ml	8
96604	Fixmaster® Fast Set Steel Epoxy	50 ml	12	5920 RTV Copper Silicone Gasket Maker	82046	300 ml	8
96675	Fixmaster® Rapid Rubber Repair Urethane	400 ml cartridge	23	598 RTV Black Silicone Gasket Maker	34018	.5 ml	8
96676	Fixmaster® Rapid Rubber Repair Urethane	150 ml	23	598 RTV Black Silicone Gasket Maker	59830	70 ml	8
96677	Fixmaster® Rapid Rubber Repair Urethane Kit	400 ml kit	23, 37	598 RTV Black Silicone Gasket Maker	59866	8.75 oz.	8
97001	Peristaltic Hand Pump		38	598 RTV Black Silicone Gasket Maker	59875	300 ml	8
97033	Fixmaster® Instant Belt Repair	1 lb.	22	598 RTV Black Silicone Gasket Maker	59891	49 lb.	8
97273	Fixmaster® Flex Accelerator	3.5 fl. oz.	22	All Purpose Spray Adhesive	30544	10.5 oz.	34
97401	Fixmaster® Flex Brushable	1 lb.	15	Aqua Power™ Cleaner & Degreaser	30565	17 oz. aerosol	31
97412	Fixmaster® Flex 80 Liquid	6 lb.	17	Aviation Gasket Sealant	30516	1 pt.	8
97413	Fixmaster® Flex 80 Liquid	1 lb.	17	Aviation Gasket Sealant	30517	0.25 pt.	8
97422	Fixmaster® Flex 80 Putty	6 lb.	15	Belt Dressing & Conditioner	30527	12 oz. aerosol	28
97423	Fixmaster® Flex 80 Putty	1 lb.	15	Big Foot™ Acrylic Pedestrian Grade, Black	36045	1 gal.	19
97434	Fixmaster® 4 Minute Epoxy	50 ml	34	Big Foot™ Acrylic Pedestrian Grade, Grey	95591	1 gal.	19
97443	Fixmaster® Stainless Steel Putty	1 lb.	12	Big Foot™ Acrylic Primer	95581	1 gal.	18
97453	Fixmaster® Aluminum Liquid	1 lb.	13	Big Foot™ Bristle Rollers	96153	2 pcs./case	38
97463	Fixmaster® Aluminum Putty	1 lb.	13	Big Foot™ Heavy Duty Pedestrian Grade, Black	96211	1 gal.	19
97473	Fixmaster® Superior Metal Putty	1 lb.	13	Big Foot™ Heavy Duty Pedestrian Grade, Black	96215	5 gal.	19
97482	Fixmaster® Steel Liquid	16 lb.	12	Big Foot™ Heavy Duty Pedestrian Grade, Grey	96261	1 gal.	19
97483	Fixmaster® Steel Liquid	1 lb.	12	Big Foot™ Heavy Duty Pedestrian Grade, Grey	96265	5 gal.	19
97484	Fixmaster® Steel Liquid	4 lb.	12	Big Foot™ Low Profile Pedestrian Grade, Black	95631	1 gal.	19
97572	Fixmaster® Marine Chocking, Green	2 gal.	20	Big Foot™ Low Profile Pedestrian Grade, Grey	95641	1 gal.	19
97762	Nordbak® Ceramic Tile Adhesive	20 lb.	14	Big Foot™ Metal Primer	96132	1 gal.	18
98372	Nordbak® High Temperature Pneu-Wear	25 lb.	14	Big Foot™ Phenolic Roller Cores	96121	4 pcs./case	38
98382	Nordbak® Pneu-Wear	25 lb.	15	Big Foot™ Primer / Sealer	94142	1 gal.	18
98383	Nordbak® Pneu-Wear	3 lb.	15	Big Foot™ Vehicular Grade, Black	96221	1 gal.	18
98468	Fixmaster® Flex Rubber Primer	2.4 fl. oz.	22	Big Foot™ Vehicular Grade, Black	96225	5 gal.	18
98471	Fixmaster® Flex Metal Primer	3.3 fl. oz.	14	Big Foot™ Vehicular Grade, Grey	96251	1 gal.	18
98693	Fixmaster® Flex Conveyor Belt Repair Kit	1 lb.	23	Big Foot™ Vehicular Grade, Grey	96255	5 gal.	18
98732	Nordbak® Brushable Ceramic - Grey	6 lb.	15	Big Foot™ Vehicular Grade, Tile Red	33957	5 gal.	18
98733	Nordbak® Brushable Ceramic - Grey	2 lb.	15	Big Foot™ Zero V.O.C. Grey	39915	1 gal.	18
98853	Fixmaster® Metal Magic Steel™	4 oz.	13	Big Foot™ Zero V.O.C., Black	96231	1 gal.	18
98992	Nordbak® Castable Wearing Compound	25 lb.	14	Big Foot™ Zero V.O.C., Black	96235	5 gal.	18
99112	Nordbak® High Temperature Wearing Compound	25 lb.	14	Big Foot™ Zero V.O.C., Grey	96245	5 gal.	18
99361	Fixmaster® Floor Fill	10 lb.	17	Black Contact Adhesive	30540	5 fl. oz.	34
99365	Fixmaster® Floor Fill	40 lb.	17	Black Max® 380 Toughened Instant Adhesive	38050	1 oz.	35
99392	Fixmaster® High Performance Epoxy	2 gal.	34	C5-A® Copper Based Anti-Seize Stick	37229	20 g	26
99393	Fixmaster® High Performance Epoxy	1 oz.	34	C5-A® Copper Based Anti-Seize	39643	1 lb.	26
99394	Fixmaster® High Performance Epoxy	50 ml	34	C5-A® Copper Based Anti-Seize	39647	8 oz.	26
99545	Fixmaster® Deep Pour Grout	5 gal.	21	C5-A® Copper Based Anti-Seize	51001	1 oz.	26
99626	Fixmaster® Etching Agent	3 fl. oz.	22	C5-A® Copper Based Anti-Seize	51002	4 oz.	26
99812	Nordbak® Wearing Compound	25 lb.	14	C5-A® Copper Based Anti-Seize	51003	12 oz. aerosol	26
99813	Nordbak® Wearing Compound	5 lb.	14	C5-A® Copper Based Anti-Seize	51004	13 oz. cartridge	26
99912	Fixmaster® Steel Putty	25 lb.	12	C5-A® Copper Based Anti-Seize	51005	10 oz.	26
99913	Fixmaster® Steel Putty	1 lb.	12	C5-A® Copper Based Anti-Seize	51006	1 lb.	26
99914	Fixmaster® Steel Putty	4 lb.	12	C5-A® Copper Based Anti-Seize	51007	1 lb.	26
983531	Dual Cartridge Applicator		38	C5-A® Copper Based Anti-Seize	51008	2.5 lb.	26
				C5-A® Copper Based Anti-Seize	51009	8 lb.	26
				C5-A® Copper Based Anti-Seize	51010	25 lb.	26
				C5-A® Copper Based Anti-Seize	51011	42 lb.	26
				C5-A® Copper Based Anti-Seize	51144	4 oz.	26



Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
CS-A [®] Copper Based Anti-Seize	51146	425 lb.	26	Fixmaster [®] High Performance Quartz	96495	42 lb.	16
CS-A [®] Copper Based Anti-Seize	51147	8 oz.	26	Fixmaster [®] Instant Belt Repair	97033	1 lb.	22
CS-A [®] Copper Based Anti-Seize	51277	7 g	26	Fixmaster [®] Magna-Crete [®]	95551	1 gal.	17
CS-A [®] Copper Based Anti-Seize	51299	2 g	26	Fixmaster [®] Magna-Crete [®]	95555	5 gal.	17
Chisel [®] MC-Free Gasket Remover	34663	15.25 oz. aerosol	30	Fixmaster [®] Magna-Crete [®] Activator	36334	10 lb.	16
Chisel [®] Gasket Remover (Methylene Chloride)	79040	18 oz.	8, 30	Fixmaster [®] Marine Chocking, Green	97572	2 gal.	20
Cold Galvanizing Compound	82039	15 oz. aerosol	29	Fixmaster [®] Marine Chocking, Orange	96102	2 gal.	20
Color Guard [®] Black Tough Rubber Coating	34894	11 oz. aerosol	29	Fixmaster [®] Metal Magic Steel™	98853	4 oz.	13
Color Guard [®] Black Tough Rubber Coating	34979	14.5 fl. oz.	29	Fixmaster [®] Rapid Rubber Repair Gun	39635		22, 38
Color Guard [®] Black Tough Rubber Coating	34980	1 gal.	29	Fixmaster [®] Rapid Rubber Repair Static Mixers	39633	6 nozzles	38
Color Guard [®] Blue Tough Rubber Coating	34895	11 oz. aerosol	29	Fixmaster [®] Rapid Rubber Repair Urethane	96675	400 ml cartridge	23
Color Guard [®] Blue Tough Rubber Coating	34982	14.5 fl. oz.	29	Fixmaster [®] Rapid Rubber Repair Urethane	96676	150 ml	23
Color Guard [®] Blue Tough Rubber Coating	34983	1 gal.	29	Fixmaster [®] Rapid Rubber Repair Urethane Kit	96677	400 ml kit	23, 37
Color Guard [®] Red Tough Rubber Coating	34896	11 oz. aerosol	29	Fixmaster [®] Stainless Steel Putty	97443	1 lb.	12
Color Guard [®] Red Tough Rubber Coating	34985	14.5 fl. oz.	29	Fixmaster [®] Steel Liquid	97482	16 lb.	12
Color Guard [®] Red Tough Rubber Coating	34986	1 gal.	29	Fixmaster [®] Steel Liquid	97483	1 lb.	12
Color Guard [®] Yellow Tough Rubber Coating	34897	11 oz. aerosol	29	Fixmaster [®] Steel Liquid	97484	4 lb.	12
Color Guard [®] Yellow Tough Rubber Coating	34988	14.5 fl. oz.	29	Fixmaster [®] Steel Putty	99912	25 lb.	12
Color Guard [®] Yellow Tough Rubber Coating	34989	1 gal.	29	Fixmaster [®] Steel Putty	99913	1 lb.	12
Contact Adhesive	30537	5 fl. oz.	34	Fixmaster [®] Steel Putty	99914	4 lb.	12
Depend [®] 330 No-Mix Adhesive	33058	250 ml	35	Fixmaster [®] Super Grout	33510	5 gal.	21
Depend [®] 330 No-Mix Adhesive	33064	300 ml	35	Fixmaster [®] Superior Metal Putty	97473	1 lb.	13
Depend [®] 330 No-Mix Adhesive Kit	20251	25 ml	35	Fixmaster [®] Underwater Repair Epoxy	82093	4 oz.	12
Depend [®] 330 No-Mix Adhesive Kit	20252	250 ml	35	Fixmaster [®] Wet Surface Repair Putty	96583	1 lb.	12
Dielectric Grease	30536	0.33 oz.	24	Flange Sealant 510 Gasket Eliminator [®]	51031	50 ml	9
Dual Cartridge Applicator	983531		38	Flange Sealant 510 Gasket Eliminator [®]	51041	250 ml	9
Electrical Contact & Parts Cleaner	25791	11 oz. aerosol	30	Flange Sealant 518 Gasket Eliminator [®]	51817	6 ml	8,9
Extend [®] Rust Treatment	30539	10.5 oz. aerosol	28	Flange Sealant 518 Gasket Eliminator [®]	51831	50 ml	8,9
Extend [®] Rust Treatment	75430	1 qt.	28	Food Grade Anti-Seize	51168	8 oz.	25
Extend [®] Rust Treatment	75448	1 gal.	28	Food Grade Anti-Seize	51170	2 lb.	25
Extend [®] Rust Treatment	75465	5 gal.	28	Food Grade Anti-Seize	51171	40 lb.	25
Extreme Pressure Grease	51242	14.5 oz.	24	Food Grade Grease	51252	14.5 oz.	26
Fixmaster [®] 4 Minute Epoxy	97434	50 ml	34	Form-A-Thread [®] Stripped Thread Repair Kit	28654	4.8 ml	37
Fixmaster [®] Aluminum Liquid	97453	1 lb.	13	Fragrance-Free Natural Blue [®] Cleaner & Degreaser	20279	55 gal.	31
Fixmaster [®] Aluminum Putty	97463	1 lb.	13	Fragrance-Free Natural Blue [®] Cleaner & Degreaser	23811	1 gal.	31
Fixmaster [®] Deep Pour Grout	99545	5 gal.	21	Gasket Sealant #1	30510	1.5 oz.	8
Fixmaster [®] Etching Agent	99626	3 fl. oz.	22	Gasket Sealant #1	30511	3 oz.	8
Fixmaster [®] Fast Cure Epoxy Mixer Cups	21425	10 - .2 fl. oz. cups	34	Gasket Sealant #1	30512	11 oz.	8
Fixmaster [®] Fast Cure Epoxy Mixer Cups	21426	10 - 1 oz. cups	34	Gasket Sealant #2	30513	1.5 oz.	8
Fixmaster [®] Fast Cure Epoxy Pak™ Epoxy (Clear Liquid)	81120	1 oz.	34	Gasket Sealant #2	30514	3 oz.	8
Fixmaster [®] Fast Set Grout	39637	2 gal.	21	Gasket Sealant #2	30515	11 oz.	8
Fixmaster [®] Fast Set Steel Epoxy	96604	50 ml	12	Gasket Sealant #2	80964	5 gal.	8
Fixmaster [®] Fast Set Steel Putty	39917	1 lb.	12	Gear, Chain and Cable Lubricant	81251	12 oz. aerosol	24
Fixmaster [®] Flex 80 Liquid	97412	6 lb.	17	Graphite - 50 Anti-Seize	51084	1 lb.	26
Fixmaster [®] Flex 80 Liquid	97413	1 lb.	17	H.V.A.C. Blue Pipe Joint Compound	82480	.25 pt.	6
Fixmaster [®] Flex 80 Putty	97422	6 lb.	15	H.V.A.C. Blue Pipe Joint Compound	82481	1 pt.	6
Fixmaster [®] Flex 80 Putty	97423	1 lb.	15	Hand Cleaner Dispensers and Accessories - Plastic Pump	90126		32
Fixmaster [®] Flex Accelerator	97273	3.5 fl. oz.	22	Hand Cleaner Dispensers and Accessories - Push type, wall mounted	95140		32
Fixmaster [®] Flex Brushable	97401	1 lb.	15	Hand Cleaner Dispensers and Accessories - Stainless Steel Pump	90123		32
Fixmaster [®] Flex Cleaner	39636	4 fl. oz.	22	Hand Cleaner Dispensers and Accessories - Wall Bracket	90128		32
Fixmaster [®] Flex Conveyor Belt Repair Kit	98693	1 lb.	23	Heavy Duty Anti-Seize	36354	8 lb.	27
Fixmaster [®] Flex Metal Primer	98471	3.3 fl. oz.	14	Heavy Duty Anti-Seize	51605	9 oz.	27
Fixmaster [®] Flex Rubber Primer	98468	2.4 fl. oz.	22	Heavy Duty Anti-Seize	51606	1.2 lb.	27
Fixmaster [®] Floor Fill	99361	10 lb.	17	Heavy Duty Anti-Seize	51607	2.3 lb.	27
Fixmaster [®] Floor Fill	99365	40 lb.	17	Heavy Duty Anti-Seize	51608	45 lb.	27
Fixmaster [®] General Purpose Epoxy Mixer Cups	21427	10 - .12 fl. oz. cups	34	Heavy Duty Anti-Seize	51609	1 oz.	27
Fixmaster [®] High Performance Epoxy	99392	2 gal.	34	Heavy Duty Pumice Lotion Hand Cleaner	21116	15 fl. oz.	33
Fixmaster [®] High Performance Epoxy	99393	1 oz.	34	Heavy Duty Pumice Lotion Hand Cleaner	21218	1 gal.	33
Fixmaster [®] High Performance Epoxy	99394	50 ml	34	High Performance N-5000 High Purity Anti-Seize (max lubrication)	51572	1 lb.	26

Product Ordering Information

Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
Hi-Tack Gasket Sealant	30524	.25 pt.	8	No More Leaks™ Plastic Pipe Sealant	80725	2 fl. oz.	7
Hi-Tack Gasket Sealant	30525	1 pt.	8	No More Leaks™ Plastic Pipe Sealant	80726	1 pt.	7
Hi-Tack Gasket Sealant	30526	9 oz.	8	Non-Chlorinated Parts Cleaner	30545	14.75 oz. aerosol	30
Hydraulic Jack Oil	30522	1 qt.	24	Non-Flammable Electrical Contact Cleaner	24379	15 oz. aerosol	30
Hydraulic Jack Oil	30523	1 gal.	24	Nordbak® Brushable Ceramic - Grey	98732	6 lb.	15
Industrial Hand Wipes	34943	75 count	32	Nordbak® Brushable Ceramic - Grey	98733	2 lb.	15
Industrial Hand Wipes	34944	130 count	32	Nordbak® Brushable Ceramic - White	96443	2 lb.	15
Instant Gasket	30507	7 oz.	9	Nordbak® Castable Wearing Compound	98992	25 lb.	14
Instant Gasket	30509	5 oz.	9	Nordbak® Ceramic Tile Adhesive	97762	20 lb.	14
Instant Gasket	30684	4 oz.	9	Nordbak® Chemical Resistant Coating	96092	12 lb.	14, 28
Krytox® RFE Advanced PTFE Dry Lubricant	30138	8 oz. aerosol	24	Nordbak® Combo Bead Wearing Compound	96303	6 lb.	15
Krytox® RFE PFPE Lubricant	31360	16 lb.	25	Nordbak® Fast Cure Pneu-Wear	96363	6 lb.	14
Krytox® RFE PFPE Lubricant	31361	16 oz.	25	Nordbak® Fast Cure Wearing Compound	96373	6 lb.	14
Krytox® RFE Cleaner	30615	10 oz. aerosol	24	Nordbak® High Impact Wearing Compound	39918	25 lb.	14
Krytox® RFE PFPE High Performance Lubricant	29709	16 oz.	25	Nordbak® High Temperature Brushable Ceramic	96433	2 lb.	14
Krytox® RFE PFPE High Performance Lubricant	29711	2 oz.	25	Nordbak® High Temperature Pneu-Wear	98372	25 lb.	14
Krytox® RFE PFPE Lubricant	29710	2 oz.	24	Nordbak® High Temperature Wearing Compound	99112	25 lb.	14
Maintain™ Lubricant, Moisture Displacer & Rust Preventer	81204	16 oz. aerosol	24	Nordbak® Pneu-Wear	98382	25 lb.	15
Maintenance Tackle Box	33486		36	Nordbak® Pneu-Wear	98383	3 lb.	15
Marine Grade Anti-Seize	34026	1 lb.	27	Nordbak® Ultra High Temperature Pneu-Wear	96332	25 lb.	14
Marine Grade Anti-Seize	34395	8 oz.	27	Nordbak® Ultra High Temperature Wearing Compound	96392	25 lb.	14
Max Strength Headliner Adhesive	37312	16.75 oz.	34	Nordbak® Wearing Compound	99812	25 lb.	14
Maxi-Coat	51211	12 oz. aerosol	29	Nordbak® Wearing Compound	99813	5 lb.	14
Maxi-Coat	51213	1 gal.	29	ODC-Free Cleaner & Degreaser	20162	16 fl. oz.	4, 6, 8, 31
Mixer Blades	96131	1 pc.	38	ODC-Free Cleaner & Degreaser	22355	15 oz.	4, 6, 8, 31
Moly - 50 Anti-Seize	51094	1 lb.	26	Orange Cream Hand Cleaner (Fine Pumice Formula)	35406	4.5 lb.	33
Moly Dry Film	39895	12 oz. aerosol	24	Orange Cream Hand Cleaner (Smooth Formula)	33406	4.5 lb.	33
Moly Dry Film	39896	1.3 lb.	24	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25104	1 gal. flat-top	33
Moly Dry Film	39897	10 lb.	24	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25108	7.5 fl. oz.	33
Moly Dry Film	39898	50 lb.	24	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25116	15 fl. oz.	33
Moly Paste	51048	8 oz.	26	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25218	1 gal.	33
Moly Paste	51049	1 lb.	26	Orange Lotion Hand Cleaner (Smooth Formula)	23104	1 gal. flat-top	33
Moly Paste	51050	12 oz. aerosol	26	Orange Lotion Hand Cleaner (Smooth Formula)	23108	7.5 fl. oz.	33
Moly Paste	51145	15 lb.	26	Orange Lotion Hand Cleaner (Smooth Formula)	23116	15 fl. oz.	33
Multi-Purpose Glass Cleaner	30546	18.75 oz. aerosol	30	Orange Lotion Hand Cleaner (Smooth Formula)	23218	1 gal.	33
N-1000 High Purity Anti-Seize	51115	8 oz.	26	Original Cream Hand Cleaner	01013	14 oz.	32
N-1000 High Purity Anti-Seize	51116	1 lb.	26	Original Cream Hand Cleaner	01406	4.25 lb.	32
N-1000 High Purity Anti-Seize	51117	2 lb.	26	O-Ring Making Kit	00112		37
N-5000 High Purity Anti-Seize	51243	8 oz.	26	Paint & Resin Removing Hand Cleaner with Fine Pumice	65116	15 fl. oz.	32
N-5000 High Purity Anti-Seize	51245	8 lb.	26	Paint & Resin Removing Hand Cleaner with Fine Pumice	65218	1 gal.	32
N-5000 High Purity Anti-Seize	51246	2 lb.	26	Paint Stripper	81716	18 oz. aerosol	30
N-5000 High Purity Anti-Seize	51269	1 lb.	26	Penetrating Oil	51221	12 oz. aerosol	24
N-5000 High Purity Anti-Seize	51346	1 oz.	26	Penetrating Oil	80032	1 pt.	24
N-7000 Metal Free Anti-Seize	51270	1 lb.	26	Peristaltic Hand Pump	97001		38
N-7000 Metal Free Anti-Seize	51272	8 oz.	26	Pipe Joint Compound	30556	.25 pt.	6
N-7000 Metal Free Anti-Seize	51273	2 lb.	26	Pipe Joint Compound	30557	1 pt.	6
Natural Blue® Cleaner & Degreaser	82244	4 fl. oz.	31	Pipe Repair Kit, 2" x 6' Tape	96321		37
Natural Blue® Cleaner & Degreaser	82249	24 fl. oz.	31	Pipe Repair Kit, 4" x 12' Tape	96322		37
Natural Blue® Cleaner & Degreaser	82251	1 gal.	31	Primer for Color Guard® Tough Rubber Coating	34994	1 gal.	28
Natural Blue® Cleaner & Degreaser	82253	5 gal.	31	Primer N 7649 (Acetone)	21347	25 g	4, 6
Natural Blue® Cleaner & Degreaser	82254	15 gal.	31	Primer N 7649 (Acetone)	21348	4.5 oz.	4, 6
Natural Blue® Cleaner & Degreaser	82255	55 gal.	31	Prism® 454 Surface Insensitive Instant Adhesive Gel	45404	3 g	35
Nickel Anti-Seize	51102	1 lb.	26	Prism® 454 Surface Insensitive Instant Adhesive Gel	45440	20 g	35
Nickel Anti-Seize	51152	8 lb.	26	Pro Strength Degreaser	30521	15 oz. aerosol	31
Nickel Anti-Seize	51286	12 oz. aerosol	26	Pro Strength Parts Cleaner	30548	19 oz. aerosol	31
Nickel Anti-Seize	77124	8 oz.	26	Pro Strength Varnish Remover	30529	12 oz. aerosol	30
Nickel Anti-Seize	77164	1 lb.	26	Quick Service Tool Kit	00101		36
Nickel Anti-Seize	77175	5 gal.	26	Quick Set™ 404 Instant Adhesive	46548	4 oz.	35
No More Leaks™ Plastic Pipe Sealant	80724	7 fl. oz.	7	Quick Set™ 404 Instant Adhesive	46551	1/3 oz	35



Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
Reliability Tool Box	31362		36	Thread Sealant 567 PST® High Temperature	56765	250 ml	7
Retaining Compound 603 Oil Tolerant	21440	10 ml	11	Thread Sealant with PTFE	30534	.25 pt.	6
Retaining Compound 603 Oil Tolerant	21441	50 ml	11	Thread Sealant with PTFE	30561	1 pt.	6
Retaining Compound 603 Oil Tolerant	21442	250 ml	11	Threadlocker 220 Medium Strength/Wicking	22041	250 ml	4
Retaining Compound 609 General Purpose	60921	10 ml	11	Threadlocker 222MS Low Strength/Small Screw	22221	10 ml	5
Retaining Compound 609 General Purpose	60931	50 ml	11	Threadlocker 222MS Low Strength/Small Screw	22231	50 ml	5
Retaining Compound 609 General Purpose	60941	250 ml	11	Threadlocker 222MS Low Strength/Small Screw	22241	250 ml	5
Retaining Compound 620 High Temperature	62015	10 ml	11	Threadlocker 242® Removable	24221	10 ml	5
Retaining Compound 620 High Temperature	62040	50 ml	11	Threadlocker 242® Removable	24231	50 ml	5
Retaining Compound 620 High Temperature	62070	250 ml	11	Threadlocker 242® Removable	24241	250 ml	5
Retaining Compound 660 Quick Metal® Press Fit Repair	30287	250 ml	10	Threadlocker 243 Oil Resistant/Medium Strength	24077	10 ml	5
Retaining Compound 660 Quick Metal® Press Fit Repair	66010	6 ml	10	Threadlocker 243 Oil Resistant/Medium Strength	24078	50 ml	5
Retaining Compound 660 Quick Metal® Press Fit Repair	66040	50 ml	10	Threadlocker 243 Oil Resistant/Medium Strength	24079	250 ml	5
Retaining Compound 680 High Strength/High Viscosity	68015	10 ml	11	Threadlocker 2440 Primerless/Medium Strength	33946	10 ml	4
Retaining Compound 680 High Strength/High Viscosity	68035	50 ml	11	Threadlocker 2440 Primerless/Medium Strength	33947	50 ml	4
Retaining Compound 680 High Strength/High Viscosity	68060	250 ml	11	Threadlocker 2440 Primerless/Medium Strength	33948	250 ml	4
Rubberized Undercoating	30538	16 oz. aerosol	29	Threadlocker 248 Medium Strength Stick	37684	9 g	5
Silicone Lubricant	51360	5.3 oz.	24	Threadlocker 248 Medium Strength Stick	37087	19 g	5
Silicone Lubricant	81246	13 oz. aerosol	24	Threadlocker 262 Permanent	26221	10 ml	5
Silver Grade Anti-Seize Stick	37230	20 g	26	Threadlocker 262 Permanent	26231	50 ml	5
Silver Grade Anti-Seize	76732	8 oz.	26	Threadlocker 262 Permanent	26241	250 ml	5
Silver Grade Anti-Seize	76759	12 oz. aerosol	26	Threadlocker 268 High Strength Stick	37685	9 g	5
Silver Grade Anti-Seize	76764	1 lb.	26	Threadlocker 268 High Strength Stick	37686	19 g	5
Silver Grade Anti-Seize	76775	5 gal.	26	Threadlocker 272 High Temp/High Strength	27240	50 ml	4
Silver Grade Anti-Seize	80206	1 gal.	26	Threadlocker 272 High Temp/High Strength	27270	250 ml	4
Silver Grade Anti-Seize	80209	4 oz.	26	Threadlocker 2760 High Strength Primerless	32525	10 ml	4
Salvo-Rust® Super Penetrating Oil	81252	13 oz. aerosol	24	Threadlocker 2760 High Strength Primerless	32526	50 ml	4
Superflex® Black RTV Silicone Adhesive Sealant	30563	7.25 oz.	8	Threadlocker 2760 High Strength Primerless	32527	250 ml	4
Superflex® Black RTV Silicone Adhesive Sealant	59330	80 ml	8	Threadlocker 277 High Strength/Large Threads	21434	10 ml	4
Superflex® Black RTV Silicone Adhesive Sealant	59375	300 ml	8	Threadlocker 277 High Strength/Large Threads	27731	50 ml	4
Superflex® Blue RTV Silicone Adhesive Sealant	30518	12 oz.	8	Threadlocker 277 High Strength/Large Threads	27741	250 ml	4
Superflex® Blue RTV Silicone Adhesive Sealant	30533	300 ml	8	Threadlocker 290 Wicking Grade	29021	10 ml	4
Superflex® Blue RTV Silicone Adhesive Sealant	30541	7.25 oz.	8	Threadlocker 290 Wicking Grade	29031	50 ml	4
Superflex® Blue RTV Silicone Adhesive Sealant	30560	80 ml	8	Threadlocker 290 Wicking Grade	29041	250 ml	4
Superflex® Clear RTV Silicone Adhesive Sealant	30562	7.25 oz.	8	Urethane Sealant - black	36132	10.2 oz.	16
Superflex® Clear RTV Silicone Adhesive Sealant	59530	80 ml	8	Urethane Sealant - grey	39916	10.2 oz.	16
Superflex® Clear RTV Silicone Adhesive Sealant	59575	300 ml	8	ViperLube™ High Performance Synthetic Gear Oil	36787	1 gal.	25
Superflex® Non-Corrosive RTV Silicone	51387	80 ml	8	ViperLube™ High Performance Synthetic Grease	36780	1 cc	25
Superflex® Non-Corrosive RTV Silicone	51388	300 ml	8	ViperLube™ High Performance Synthetic Grease	36781	3 oz.	25
Superflex® Red High Temp RTV Silicone Adhesive Sealant	30564	7.25 oz.	9	ViperLube™ High Performance Synthetic Grease	36782	14 oz.	25
Superflex® Red High Temp RTV Silicone Adhesive Sealant	59630	80 ml	9	ViperLube™ High Performance Synthetic Grease	36783	400 g	25
Superflex® Red High Temp RTV Silicone Adhesive Sealant	59675	300 ml	9	ViperLube™ High Performance Synthetic Grease	36784	.42 oz.	25
Superflex® Red High Temp RTV Silicone Adhesive Sealant	82279	12 oz.	9	ViperLube™ High Performance Synthetic Grease	36786	11 oz. aerosol	25
Superflex® White RTV Silicone Adhesive Sealant	59430	80 ml	8	ViperLube™ High Performance Synthetic Grease	37061	5 gal.	25
Superflex® White RTV Silicone Adhesive Sealant	59475	300 ml	8	ViperLube™ High Performance Synthetic Lightweight Oil	36788	1 gal.	25
Superflex® White RTV Silicone Adhesive Sealant	82518	7.25 oz.	8	White High Temp Anti-Seize	34517	8 oz.	26
Thinner for Color Guard® Tough Rubber Coating	34995	1 gal.	28	White High Temp Anti-Seize	34518	1 lb.	26
Thread Sealant 545 Hydraulic/Pneumatic	32429	10 ml	7	White Lithium Grease	30530	1.5 oz.	24
Thread Sealant 545 Hydraulic/Pneumatic Sealant	54531	50 ml	7	White Lithium Grease	30543	10.75 oz. aerosol	24
Thread Sealant 545 Hydraulic/Pneumatic Sealant	54541	250 ml	7	Zinc Anti-Seize	39901	1 lb.	27
Thread Sealant 564 Lower Strength	28753	6 ml	6				
Thread Sealant 564 Lower Strength	28754	50 ml	6				
Thread Sealant 564 Lower Strength	28755	250 ml	6				
Thread Sealant 565 PST® Controlled Strength	56531	50 ml	7				
Thread Sealant 565 PST® Controlled Strength	56541	250 ml	7				
Thread Sealant 567 PST® High Temperature	33241	16 oz.	7				
Thread Sealant 567 PST® High Temperature	56707	6 ml	7				
Thread Sealant 567 PST® High Temperature	56747	50 ml	7				

Henkel Loctite Corporation
1001 Trout Brook Crossing
Rocky Hill, Connecticut 06067
1-800-LOCTITE (562-8483)
www.loctite.com

Henkel Loctite Canada Inc.
2225 Meadowpine Blvd.
Mississauga, Ontario L5N 7P2
905-814-6511
800-263-5043 (within Canada)

Visit us on the web

www.loctite.com

All trademarks in this catalog, except where noted, are the property of or used under license by Henkel Loctite Corporation, U.S.A.

Krytox is a registered trademark of E.I. DuPont de Nemours Co., Inc.
NSF is a registered trademark of NSF International.
CSA is a registered trademark of CSA International.
UL is a registered trademark of Underwriter's Laboratories, Inc.
Copyright 2003. Henkel Loctite Corporation. All rights reserved.

Printed in the U.S.A. 1400

LT-3722B